

# Fujica AX-5

AKA - Porst CR-7

This camera manual library is for reference and historical purposes, all rights reserved.

This page is copyright by [mike@butkus.org](mailto:mike@butkus.org), M. Butkus, NJ.

This page may not be sold or distributed without the expressed permission of the producer.

On-line camera manual library

**If you find this manual useful, how about a donation of \$3 to:**

**M. Butkus, 29 Lake Ave., High Bridge, NJ 08829**

**This will help me to continue to host this site,  
buy new manuals, and pay their shipping costs.  
It'll make you feel better, won't it?**

**If you use Pay Pal, use the link below.  
Use the above address for a check, M.O. or cash.**



[www.PayPal.me/butkus](http://www.PayPal.me/butkus)

Venmo is [@mike-butkus-camera](https://venmo.com/mike-butkus-camera)

**<<< IF YOU WOULD LIKE THIS OR ANY PDF FILE PRINTED, BOUND AND MAILED TO YOU, SEE THIS OUTSIDE COMPANY'S OFFER >>>**

**[Back to my main Camera Manual page](#)**

---

**[CLICK HERE TO CONTINUE TO PDF MANUAL](#)**

**- better printing -**

**[Fujica AX Accessories](#)**



Fixed images 7-9-'02

## [Go to Fujica System Accessories](#)

### CONTENTS

Special features .... . . . .

Names of parts .....

Getting ready to take pictures . . . . .

1 Attaching the strap and putting the camera in its case .....

2. Mounting and dismounting the lens . . . . .

3 Loading and checking the battery . . . . .

4. Loading the film .....

5. Setting the film speed selector . . . . .

6. Aiming the camera . . . . .

Taking automatic exposure pictures

1. Numbers and letters on the Shutter .. . . .


2. Choosing the exposure mode . . . . .

3. Viewfinder information.....


4. Programmed automatic exposure .....
5. Aperture-preferred automatic exposure.....
6. Shutter-preferred automatic exposure.....
7. Focusing the lens .....
8. Rewinding the film .....




(1) This compact, lightweight, aperture-preferred AE camera has a built-in microcomputer, product of the latest in electronic engineering, to insure high precision automatic exposure in candlelight to sunlight.

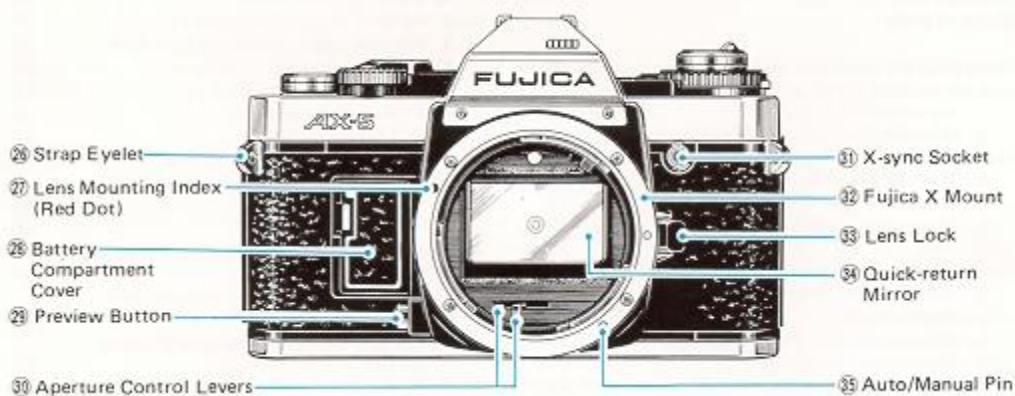

(2) Five LED shutter speed indicators in the viewfinder let you set exposure in an instant so that you won't miss those once-in-a-lifetime shots. Three-way (split-image, microprism, ground glass screen) focusing lets you focus any type of subject quickly and sharply.

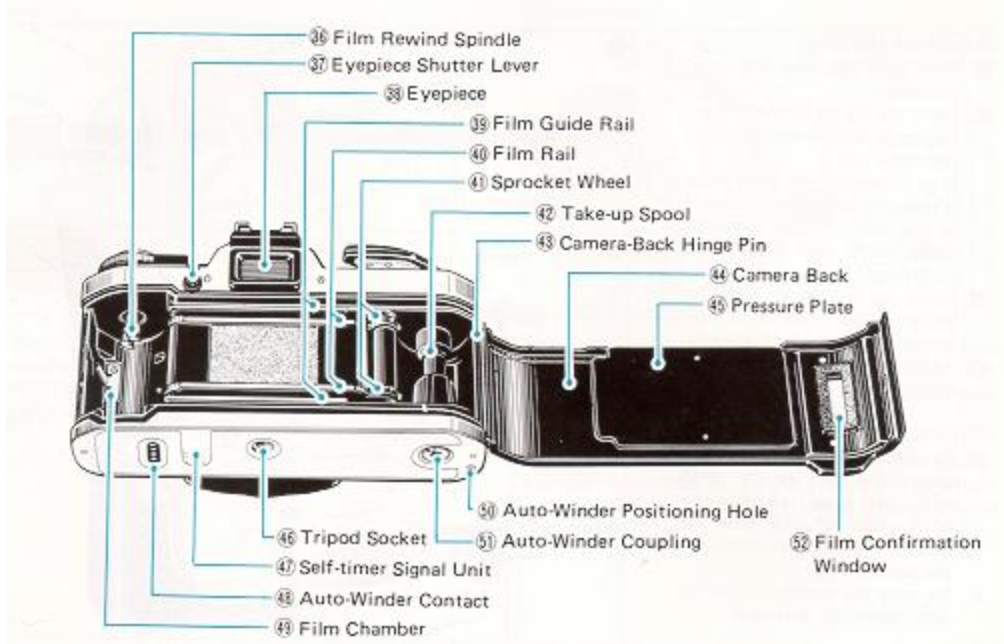


(3) Soft-touch electromagnetic shutter release permits even the first-time user to shoot without camera shake; Auto Winder X (optional accessory) lets you shoot continuously at 2 fps; unique, high-precision electronically controlled self-timer emits a penetrating beep beep to keep you alert until the shutter trips.

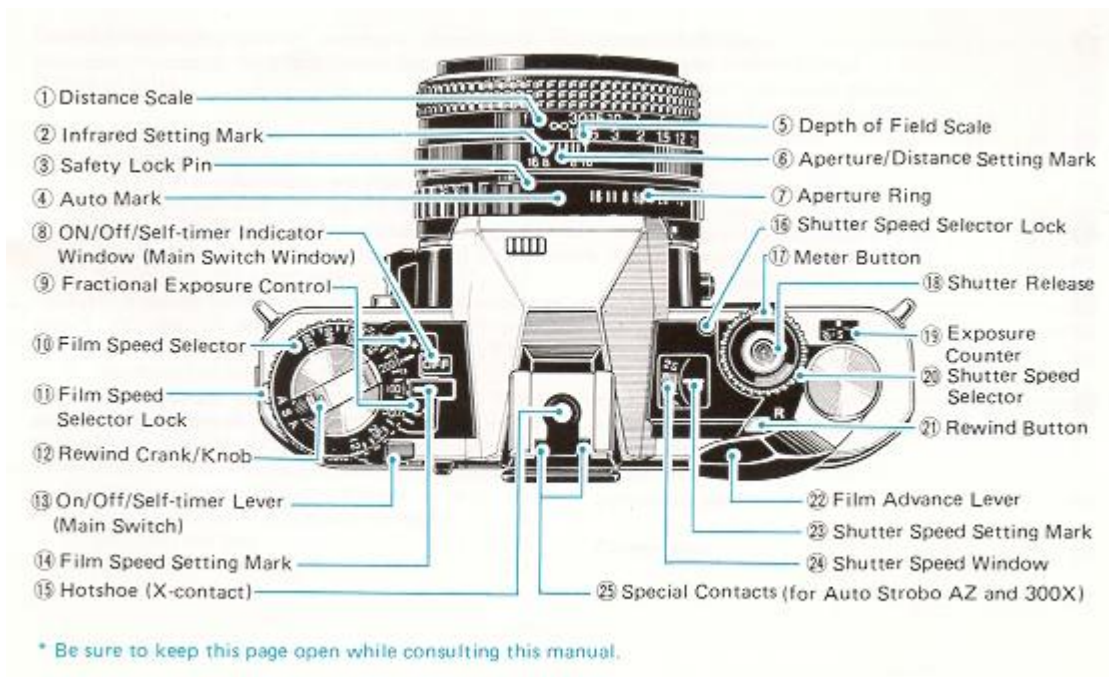

(4) A wide assortment of "system accessories" including the unique Fujica Auto Strobe 300X (G. No. 30), Fujica Auto Strobe AZ (G. No. 17) and Fujica Photo Recorder for printing data on the film, expands your picture-taking scope well beyond present horizons.

(5) Fujica X "short turn" (65°) lens mount permits quick lens changing and accepts the entire line of new X-Fujinon interchangeable lenses from wide-angle to telephoto as well as other lenses to take full advantage of the SLR system.

## 1. Attaching the strap

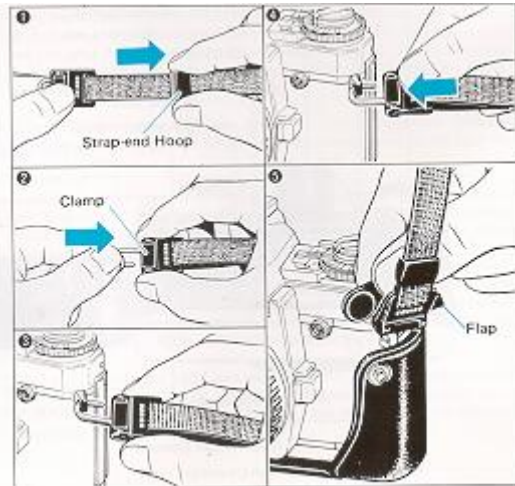

- \* Slide back the strap end hoop as shown.
- \* Hold the clamp between your fingers as shown and pull out the metal clip.
- \* The clamp may be tight when it's new. If you find it difficult to pull out the clip, open the clamp with your fingers and pull it out.
- \* Hook the clip to the camera's Strap Eyelet and push the clamp forward to lock the clip.
- \* slide back the strap-end hoop tightly against the clamp.

## Putting the camera in its case

Put the camera in its case and secure the cam to the strap with the flaps provided on both sides of the case by closing the snaps. Next, put on the case cover,

To take the camera out of its case, repeat (5) in reverse.

## 2. MOUNTING AND DISMOUNTING THE LENS



Position the red dot on the lens rear opposite the red dot on the Lens Mount, then push the Lens in and turn it 65° to the right (clockwise). It will lock into position with a click.


While pressing in the Lens Lock toward the camera body, turn the Lens to the left (counter-clockwise) as far as it will go, then pull it out toward the front.

Using the Rubber Lens Hood

### 3. LOADING AND CHECKING THE BATTERY

When shooting against the light, fit the accessory Rubber Lens Hood on to the lens to prevent flare and ghost caused by the light falling directly on the lens surface.

Loading the Battery

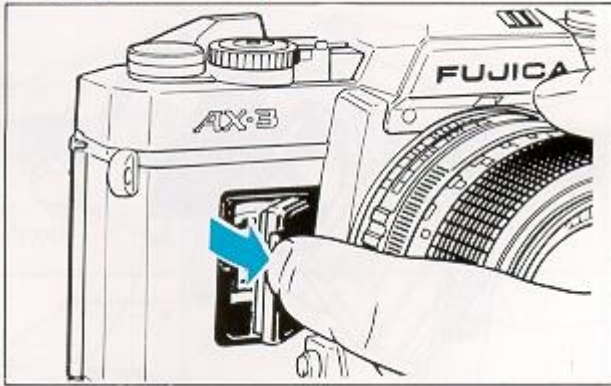

Choosing the Right Battery You can use any one of the following batteries but be sure to use a new batter.

6-volt silver oxide battery: (4SR44)

6-volt alkaline manganese battery: (4LR44)

6-volt lithium battery


**Notes:** 1. One new silver-oxide battery and lithium battery will normally last about 6 months, and one new alkaline-manganese battery about 4 months.

2. Before loading, wipe both ends of the battery clean with a dry piece of cloth.


3. If you are not taking pictures for a long while, remove the battery before putting the camera away.

4. It is recommended to use a silver oxide battery for shooting in cold weather.

(1) Remove the Battery Compartment Cover by pushing the Cover Lock in toward the Lens with your fingernail and lifting it up.

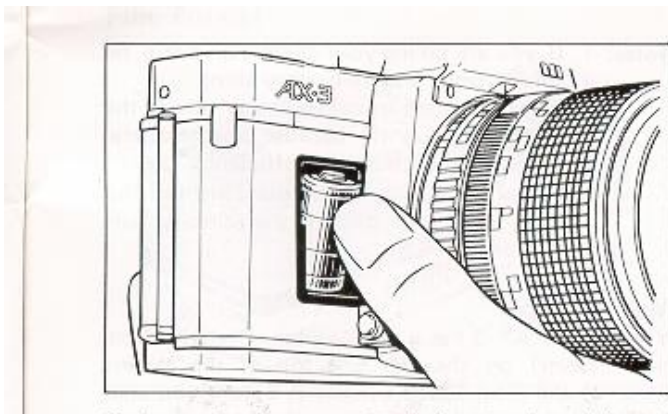


Checking the Battery

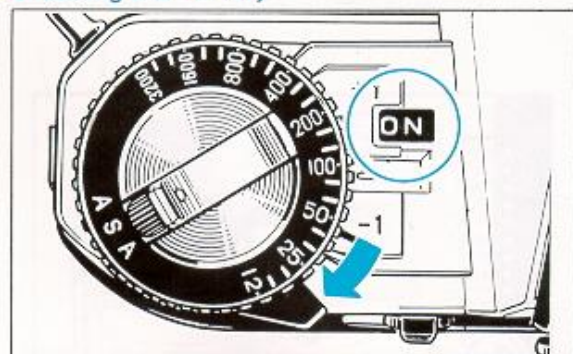

- (2) Insert the battery, plus (+) and minus ( - ) ends correctly, as shown in the Battery Compartment.
- (3) The battery will load easier if you insert the minus ( - ) end first.
- (4) To unload, press down and pull out the plus (+) end of the battery with your fingernail.
- (5) Replace the Battery Compartment Cover by sliding in the inner edge and pressing the cover down.

If the battery is not up to the required strength, you will not get properly exposed pictures because your Fujica AX-5's shutter is electronically controlled regardless of the exposure mode employed. Make it a habit to check the battery before you start taking pictures.

- (1) Turn on the main switch.
- (2) While looking through the Viewfinder, press the Shutter Release halfway down.
- (3) If the red LED opposite the letter "B" at the bottom of the shutter speed scale blinks (about 4 times a second), it's time to change the battery. However, if you are using an alkaline-manganese battery, the LED will start to blink earlier than when using other types of batteries. In this case, there is still enough power left to expose several rolls of film.

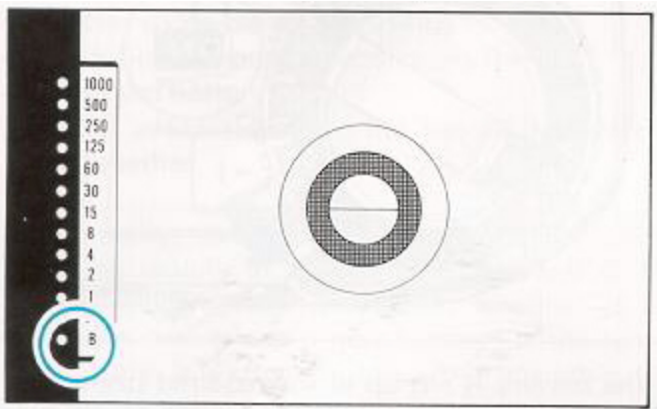

- (4) If no LED turns on in the viewfinder, the camera will not operate because the battery strength is insufficient.

Notes: 1. If you are taking your camera on a trip, be sure to bring a spare battery along.

2. When shooting in cold weather, check the battery frequently because low temperatures will reduce battery efficiency.

### **Main Switch**

Your Fujica AX-5 has a main switch (ON/OFF/Self timer Lever) on the left side top of the camera (next to the Film Speed Selector). Before you start taking pictures and before you check the battery, be sure to switch it ON by pulling the lever out toward you while watching the Main Switch Window.

If you are not taking pictures, switch it off to prevent unnecessary battery drain.

## 4. LOAD THE FILM

Use cartridge-packed 35mm roll film (135 type) Always load and unload film in subdued light




Use cartridge-packed 35mm roll film.


- Always load and unload film in subdued light.

(1) Open the Camera Back by pulling the Film Rewind Knob all the way out. (It will not open unless the knob is fully pulled out.)

### Loading

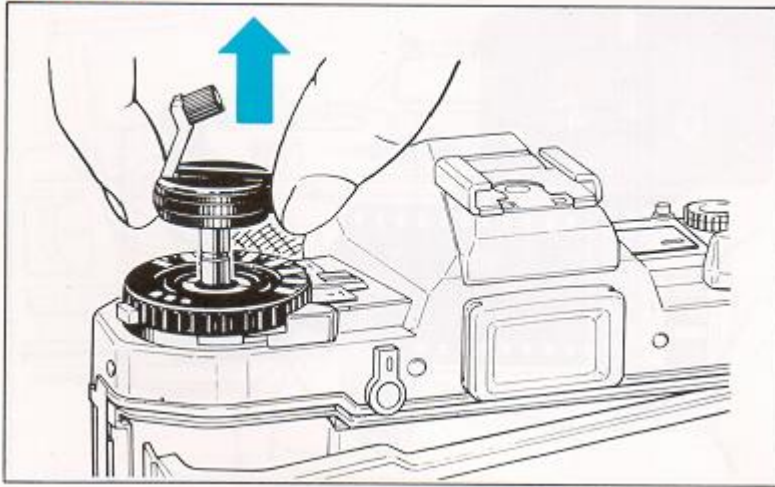


(2) Drop the film cartridge into the Film Chamber with the spool head (protruding portion of the cartridge) pointing to the camera bottom, then push the Film Rewind Knob down to its original position.

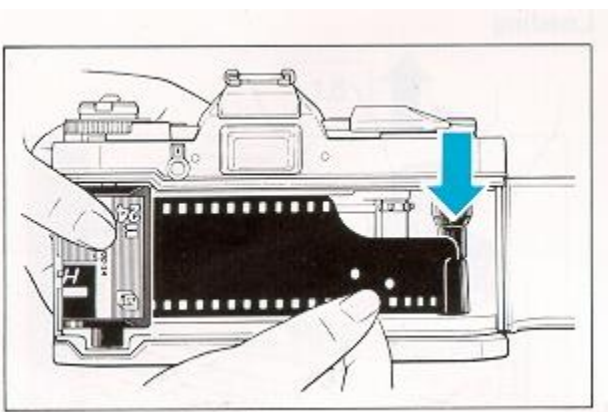


(3) Pull out the film tip and insert it deeply into the slot of the Take-up Spool, but make sure it doesn't go through the spool hub.




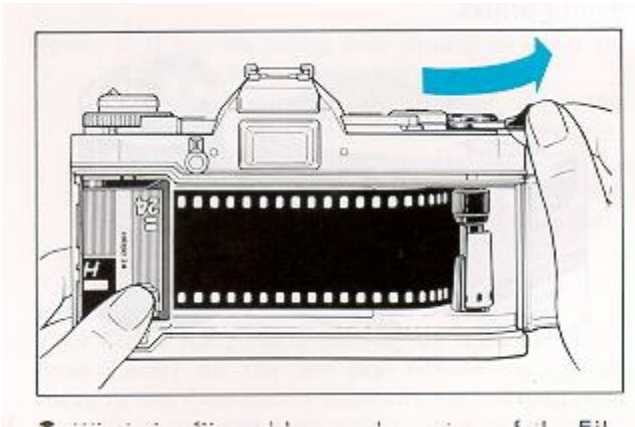

(4) Wind the film with a stroke or two of the Film Advance Lever and make sure the Sprocket Teeth catch the film perforations.

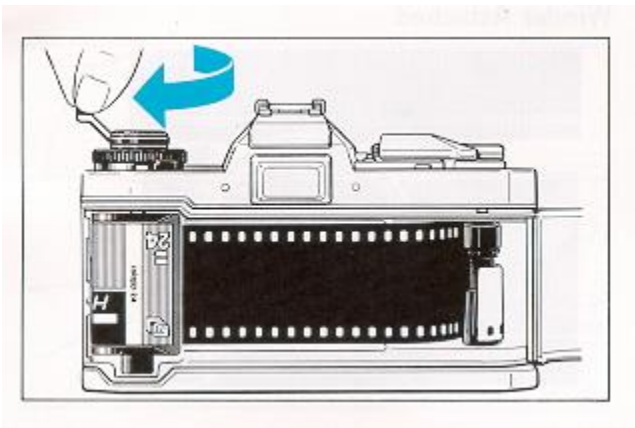

(5) Erect the Film Rewind Crank and turn it in the direction of the arrow to take up any slack in the film, make sure the film is properly positioned between the guide rails, then close the Camera Back.

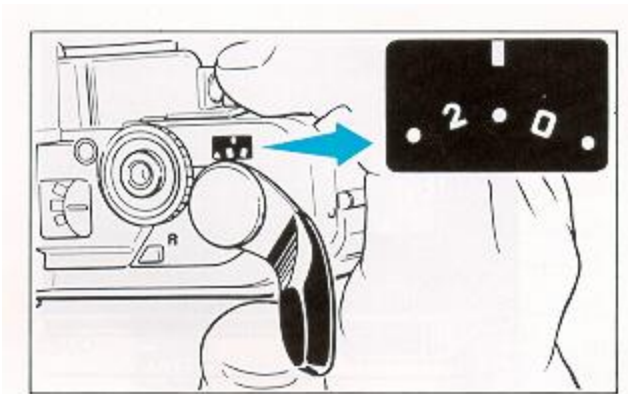


(6) While watching the Exposure Counter, wind the film with the Film Advance Lever and press down the Shutter Release. Repeat until the second white dot from the letter "S" (first white dot from the red "O") appears in the center of the Exposure Counter. The film has now been positioned for the first shot.

\* The film is advancing properly if the Film Rewind Knob turns while the Film Advance Lever is winding.

\* The white dots between the numbers in the Exposure Counter represent odd numbers.

\* You can position the film faster by setting the Shutter Speed Selector to 1000 and moving the Aperture Ring off auto (orange diamond) mark because the shutter will trip faster.

(7) Film identification The Film Confirmation Window in the camera back will tell you at a glance whether there is film in the camera or not. If you have Fuji film in your camera, it will also tell you the film type and the number of exposures it will yield.

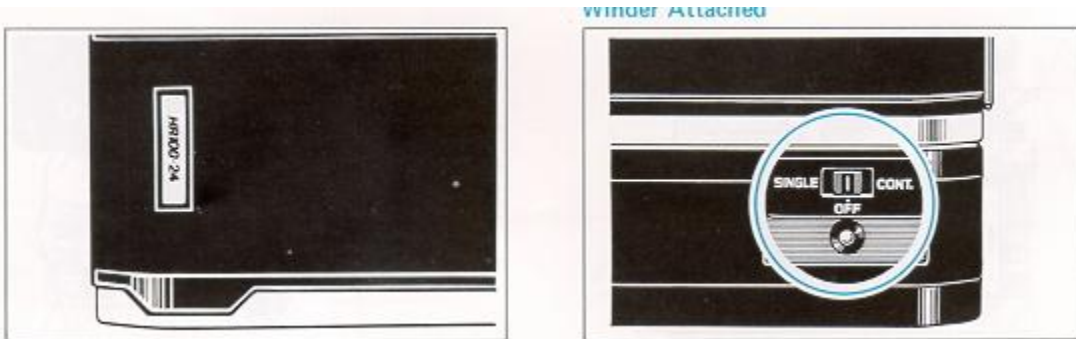


### Loading the film with the Fujica Auto Winder Attached

The procedure is the same as that described in (1) to (5) . To wind the film, close the Camera Back, switch the auto winder switch to SINGLE or CONT. and press down the Shutter Release.

\* If the film does not advance, turn off the auto winder and switch it once again to SINGLE or CONT.

\* For further information read the Auto Winder instruction manual.

## 5. FILM SPEED SELECTOR

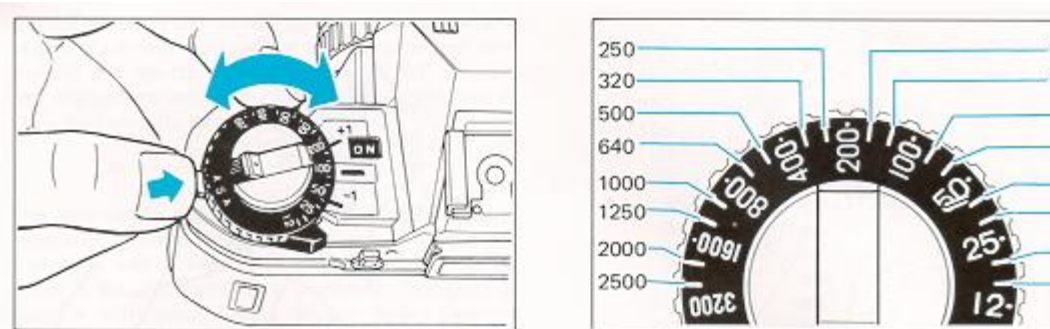

After loading the film, be sure to set the Film Speed Selector because your pictures will not be properly exposed if it is not set for the speed of the film loaded in the camera. The speed of the film you are using is printed on the film box.

(1) While pressing in the Film Speed Selector Lock (a white button at the side of the Film Speed Selector), turn the selector dial and set it for the speed of the film you are using, that is, if you are using an ASA 100 film, set the number 100 opposite the Film Speed Setting Mark.


\* The marks labeled +1 and -1 on each side of the Film Speed Setting mark are used for making exposure compensation. Be sure to use the center mark for setting the Film Speed Selector.

(2) The lines etched between the numbers on the Film Speed Selector represent the ASA speeds shown in the illustration above.

(3) The corresponding ASA and DIN film speeds are as follows:

ASA	25	32	40	50	64	80	100	200	250	320	400	800
DIN	16	16	17	18	19	20	21	24	25	26	27	30

## 6. AIMING THE CAMERA

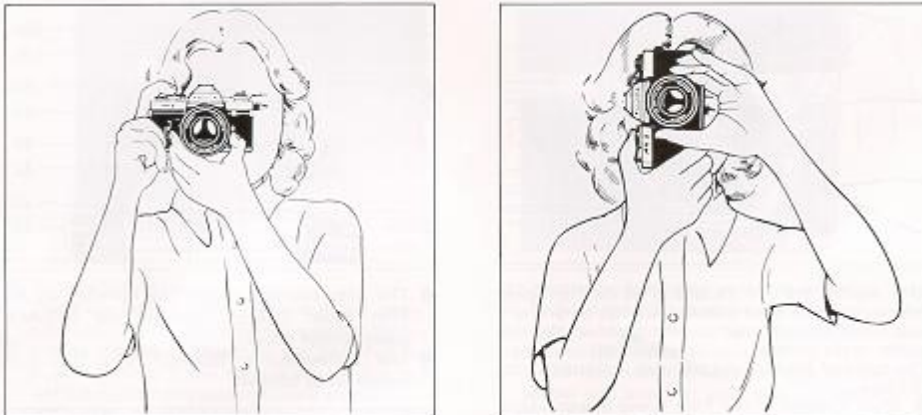

1) Hold the camera with your left hand as shown, press the left elbow against the side of your chest, relax your right hand and press the Shutter Release gently down.

2) When shooting with the camera held vertically, try to keep it extra steady because it will be less stable in that position,

3) The film is advanced with the right thumb and the Shutter Release is depressed with the right for finger.

## 1. NUMBERS AND LETTERS ON THE SHUTTER SPEED SELECTOR

Your Fujica AX-5 is a super-sophisticated multimode automatic exposure camera which is capable of programmed, aperture preferred, and shutter preferred automatic exposure, as well as manual exposure.



Your AX-5's shutter is controlled electronically from 1/1000 - 2-sec. through B regardless of whether the camera is operated automatically or manually.

· The numbers and letters etched on the Shutter Speed Selector are shown in the right-hand table.

1000	.....	1/1000	sec.	] Speeds for manual setting
500	.....	1/500	sec.	
250	.....	1/250	sec.	
125	.....	1/125	sec.	
60	.....	1/60	sec.	
30	.....	1/30	sec.	
15	.....	1/15	sec.	
8	.....	1/8	sec.	
4	.....	1/4	sec.	
2	.....	1/2	sec.	
1	.....	1	sec.	
2S	.....	2	sec.	
AE	.....	Automatic exposure		
AEL	.....	Automatic exposure with memory lock (AE lock)		
B	.....	Bulb (manually timed long exposures)		

## 2. CHOOSING THE EXPOSURE MODE

The Shutter Speed and Aperture Ring setting for automatic exposure are as follows:

	Aperture Ring Setting	Shutter Speed Selector Setting	Exposure Mode Indicator in Viewfinder
Reprogrammed AE	Orange auto mark 	AE	P
Aperture-preferred AE	Manual setting from max.-min. aperture	AE or AEL	F
Shutter-preferred AE	Orange auto mark 	manual setting from 1/1000 - 1/2 sec.	T


Notes: 1. To move the Aperture Ring to the orange auto mark and from there back to the apertures for manual setting, turn the ring while pressing down the Safety Lock Pin provided on it.

2. When the Shutter Speed Selector is set to AEL for aperture-preferred automatic exposure, the exposure setting seen through the Viewfinder when the Shutter Release is depressed halfway will remain locked until you take your finger off the Shutter Release. In other words, the shutter speed will remain the same even if there are changes in the subject brightness (aperture values). (Refer to the paragraph entitled "AK Lock" on page 35.)

### 3. VIEWFINDER INFORMATION

The information provided in the Viewfinder of your AX-5 is as follows:

If an f-number which falls between the numbers etched on the viewfinder aperture scale has been selected, the LED opposite the number nearest to it will turn on.

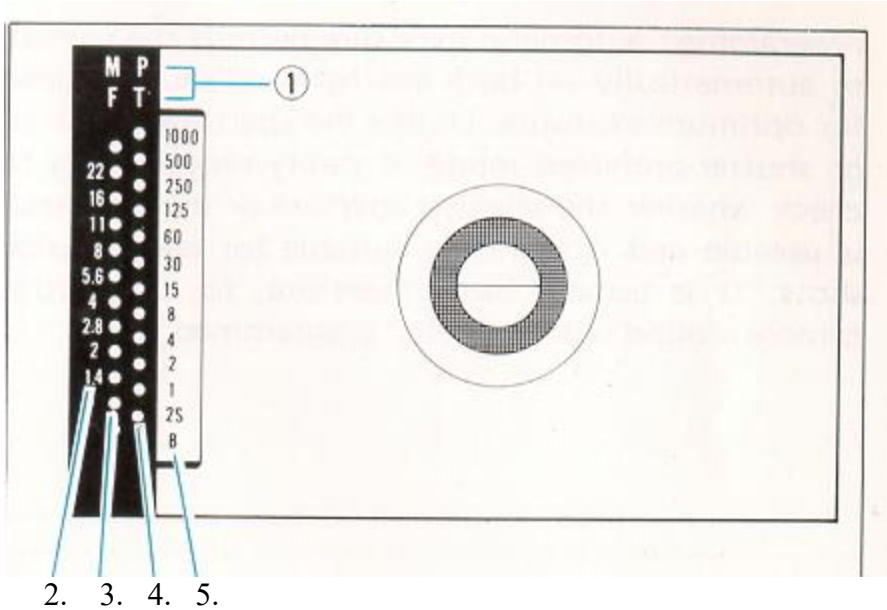


- (1) Red exposure mode indicator
- (2) Aperture scale
- (3) Yellow LED aperture indicator
- (4) Red LED shutter speed indicator
- (5) Shutter speed scale


Example: If you are using an F1.6 lens and have Set the aperture at 1.6, the LED opposite F 1.4 will turn on, and if you are using an F1.8 lens and have set the aperture at F1.8, the LED opposite F2 will turn on, etc.

Sometimes, however, it may not be the LED opposite the nearest number that will turn on. For example, the LED opposite F2 may turn on although the selected aperture is F1.6, but this is extremely rare and can be ignored.


## 4. PROGRAMMED AUTOMATIC EXPOSURE

Programmed automatic exposure permits the camera to automatically set both aperture and shutter speed for optimum exposure. Unlike the aperture-preferred or shutter-preferred mode, it rarely requires you to check whether the selected aperture or shutter speed is useable and is therefore suitable for taking quick shots. It is usually best, therefore, to carry your camera around with it set for programmed AK.

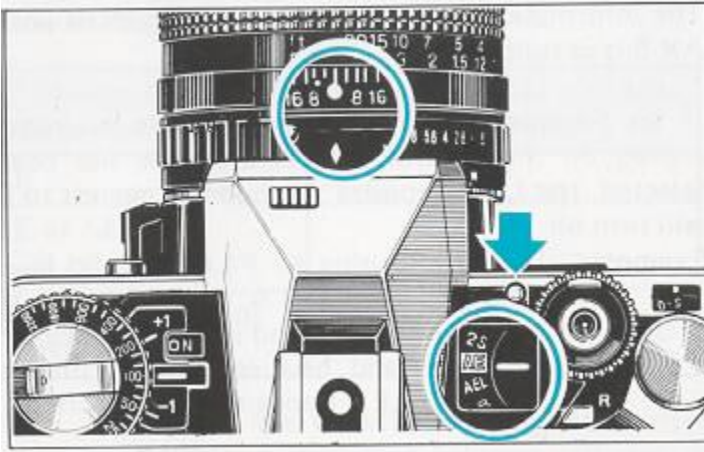

(1) Set the orange auto mark  on the Aperture Ring opposite the Aperture Setting Mark and set the Shutter Speed Selector to AK.

Note: If the Shutter Speed Selector is in AEL position, turn and set it to AE while pressing in the Shutter Speed Selector Lock.

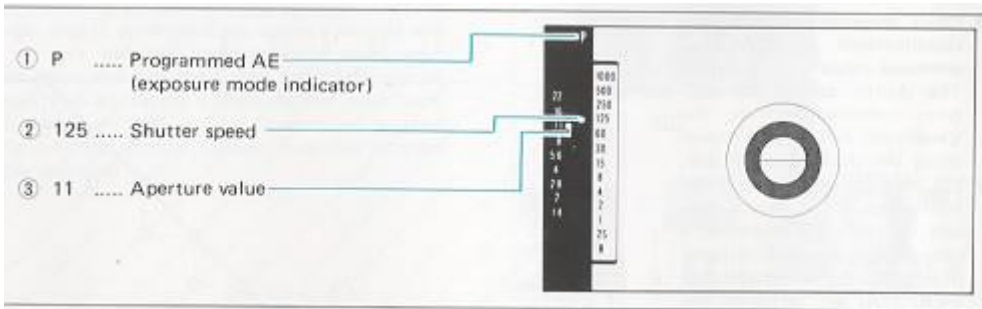


(2) The LEDs in the viewfinder will turn on to show you the camera-selected shutter speed and aperture combination when the Meter Button is depressed or the Shutter Release is pressed halfway down.

\* If the reading is as shown above, exposure will be made with an aperture of F11 and a shutter speed of 1/125 sec.

(3) If the LED opposite "1000" blinks (at the rate of 8 times a second), it means your picture will be overexposed; and if the LED opposite "2S" blinks (also at the rate of 8 times a second), it means your picture will be underexposed.

### 4. Chart showing the exposure combinations of the programmed mode


The shutter speed and aperture combinations in the Viewfinder will vary as shown along the thick diagonal line, but they may sometimes differ from the actual values that will be used. For example, a subject having a light value of 9 will actually be exposed at F4.8, 1/20 sec. although the viewfinder indication will be F4, 1/30 sec.

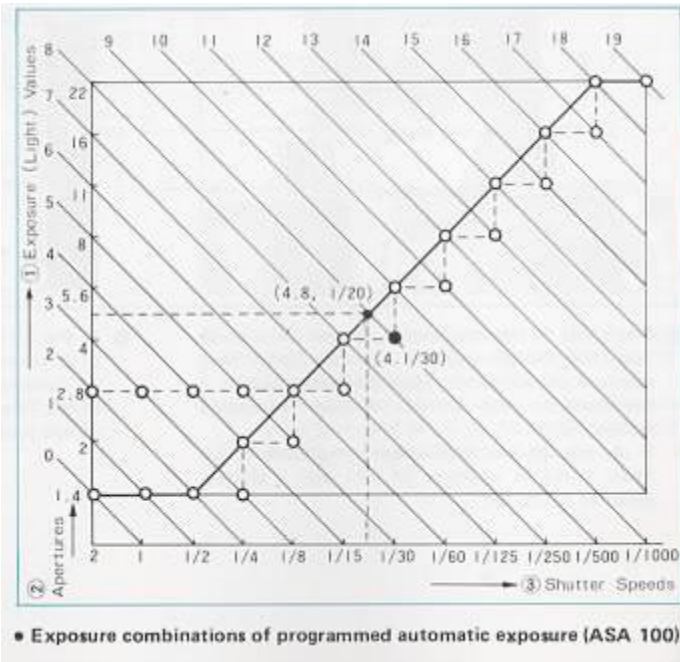

With an F1.4 lens or F2.8 lens on the camera, the shutter speed alone will slow down by an initial speed of 1/2 or 1/8 sec. respectively.

## 5. APERTURE-PREFERRED AUTOMATIC EXPOSURE

This is the mode to use when the emphasis is on the aperture, that is, when you are taking a portrait and want to blur out the background to make your subject stand out (use the largest possible aperture) or when you are taking a close-up and want maximum depth of field so that everything in your picture will be sharply focused (use the smallest possible aperture).

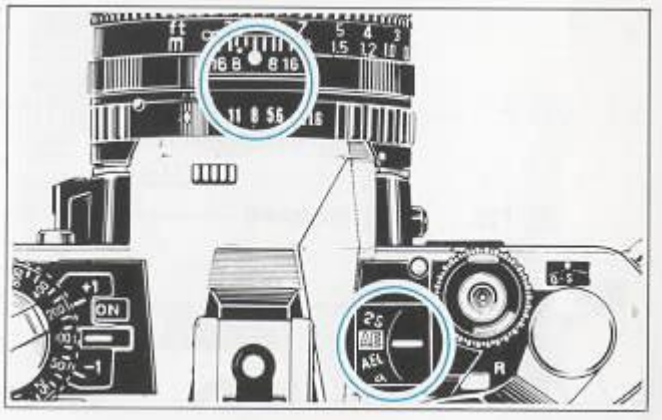

(1) Set the Shutter Speed Selector to AE or AEL.

(2) Set the Aperture Ring to the desired value, that is, if you are using an EBC X-Fujinon 1:1.6, 50mm lens, set it anywhere from 1.6 to 16.


(3) The LEDs in the Viewfinder will turn on to show you the selected aperture and the shutter speed coupled to it by the camera when the Meter Button is depressed or the Shutter Release is pressed halfway down.

\* If the reading is as shown above, exposure will be made with an aperture of F2 and a shutter speed of 1/125 sec.

#### (4) Over and underexposure warning

If the aperture you selected is not compatible with the camera's shutter speed range; that is, if it is too large and needs a shutter speed which is faster than 1/1000-sec., the red LED opposite "1000" will turn on and blink (at the rate of


8 times a second) to warn you that your picture will be overexposed; and if it is too small and needs a shutter speed that is slower than 2 seconds, the red LED opposite "2S" will turn on and blink (also at the rate of 8 times a second) to warn you that your picture will be underexposed.

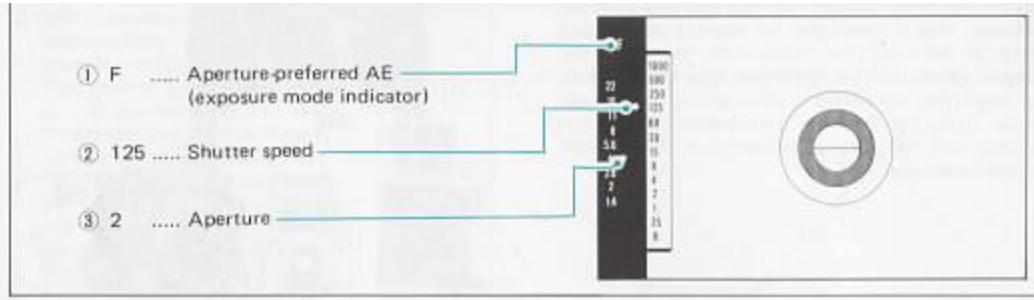

(5) If you are taking a dimly lit subject on aperture-preferred AE, the camera may provide a shutter speed of less than 1/30-sec. depending on the aperture you selected, in which case you will have to guard against camera shake by mounting the camera on a tripod or using something firm to support the camera, such as a table or the top of a chair.

## 6. SHUTTER-PREFERRED AUTOMATIC EXPOSURE

In contrast to the aperture-preferred mode, which is used mainly for creating artistic affects such as intentional blurs, the shutter-preferred mode is used mainly for taking action pictures with the shutter speed normally set to 1/60-sec. or faster to eliminate the effects of camera shake. This is the mode to use if you want to freeze action with a fast shutter speed or create the appearance of motion in your picture with a slow shutter speed.

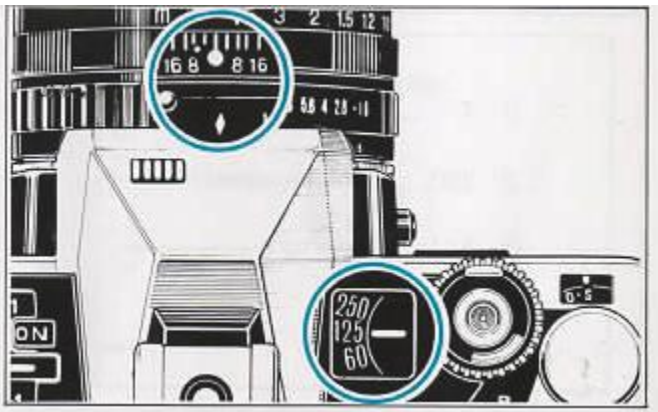

(1) Set the orange auto mark (a) on the Aperture Ring opposite the Setting Mark.


(2) Set the Shutter Speed Selector to the speed you want.

Notes:

1. If the Shutter Speed Selector is in AS or AEL position, turn it while pressing in the Shutter Speed Selector Lock.



2. If you are shooting on shutter-preferred AE, it is not recommended to set the Shutter Speed Selector Dial to "B", "1" or "2S". If you want to use these speeds, you'll have to use manual exposure.

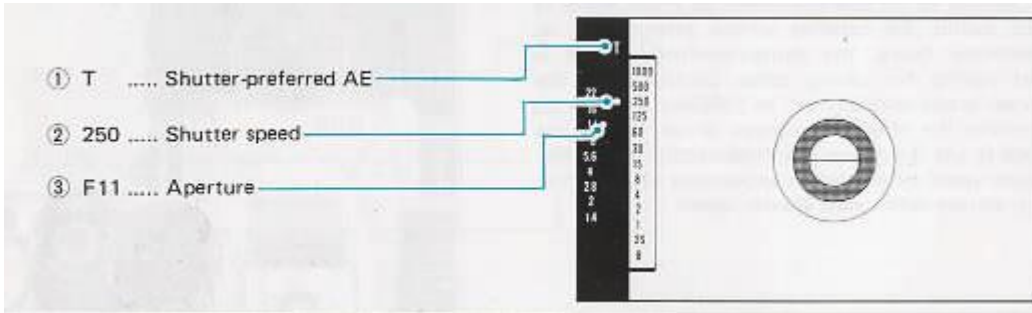

(3) The LEDs in the Viewfinder will show you the selected shutter speed and the aperture provided by the camera when the Meter Button is depressed or the Shutter Release is pressed halfway down.

\* If the reading is as shown above, exposure will be made with a shutter speed of 1/250~sec. and an aperture of F11.


Notes:

1. If two yellow LEDs turn on at the same time, exposure will be made with an aperture that lies between them.
2. In the shutter-preferred AE mode, the aperture which will be automatically set by the camera may vary + 1 step maximum. To correct this, the camera can provide automatic shutter speed compensation of + 1 step for the shutter speed you have set.


(4) Automatic shutter speed compensation

If the lens you are using does not have an aperture that will accommodate the shutter speed you selected, the yellow LED at the top or bottom of the aperture scale will turn on and blink. However, even if you trip the shutter by mistake, your picture will be properly exposed because the Fujica AX-5 is built to provide automatic compensation for shutter speed.

\* If the brightness of your subject is beyond the camera's light metering range (EV 0 - 19, see page 34 Light metering range), however, your picture will not be correctly exposed.

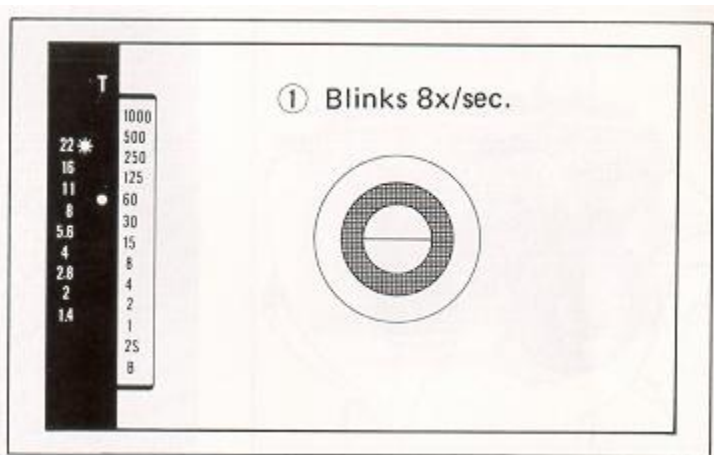


\* If, after setting the shutter speed, the yellow LED opposite "22" blinks to warn you of overexposure as illustrated in the right-hand figure the normal thing to do is to use a faster shutter speed to turn off the warning, but even if you should trip the shutter, it will automatically switch to a higher speed to provide correct exposure.

Note: When the Aperture Ring is set to the orange auto mark , an X-Fujinon DM lens will provide an aperture equivalent to F22 even if its minimum aperture is F16 as in the case of the AX-5's F1.6/50mm lens. Depending on the shutter speed setting, therefore, the yellow LED opposite "22" may sometimes turn on. In this case, you will have to reset the shutter speed so that yellow LED moves down to 16 or under.

#### 4) FOCUSING THE LENS



\* Eyesight adjustment lens The far- or near-sighted can use an eyesight adjustment lens (+2, +0.5, -2.5, -4 diop., optional accessory). It will let you focus the lens without glasses.

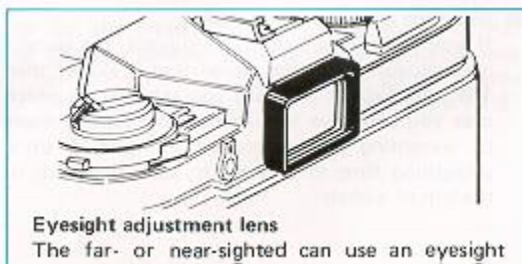

In the center of the viewfinder of your Fujica AX-1, you will see a split-image spot, a microprism collar around it which, in turn, is surrounded by a ground glass screen. Any one of them can be used for focusing the lens.

#### FOCUSING WITH THE SPLIT IMAGE CENTER

1) Look through the Viewfinder, center the part of the subject on which you want to focus the lens in the split-image center and turn the Distance Ring.

2) Your subject is in sharp focus when the upper and lower segments of the image in the split image center fall in line. This method of focusing is best for taking pictures of subjects that are formed mainly of straight lines such as buildings, towers etc



## FOCUSING WITH THE MICROPRISM COLLAR

- 1) Look at your subject through the microprism collar and turn the Distance Ring.
- 2) Your subject is in sharp focus when it appears smooth and clear. This method of focusing is recommended for portrait work.

## Focusing with the Ground-glass Screen

Look at your subject through the ground-glass screen and turn the Distance Ring. Your subject is in sharp focus when it appears sharp and clear. This method is recommended for focusing the lens quickly and for copying work.

## Focusing by Eye Estimation

Estimate the distance from camera to subject with your eye and set the Distance Ring to that distance (white numbers = meters, green numbers = feet).


This method is best for taking quick snapshots. However, if you are using a large aperture or are taking close-ups, or if you are shooting with a telephoto lens, be sure to focus the lens precisely,

## 5. REWINDING THE FILM

After exposing a roll of film, wind it back into its cartridge and take it to your photofinisher as soon as possible.


- \* If you are at the end of a roll and the Film Advance Lever feels tight as you are winding it, do not force it. Just return it to its normal position and rewind the film into its cartridge.

- 1) Press in the Rewind Button (provided on the camera top)

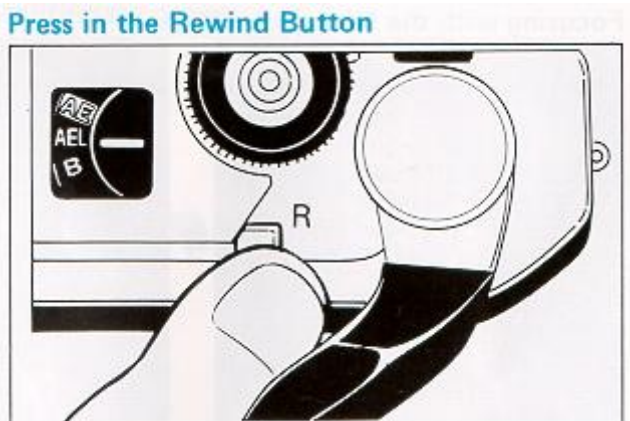

Note: Before pressing in the Rewind Button, pull out the Film Advance Lever by a stand-off angle of the lever, or the Rewind Button may disengage and the film may not be rewound.


### Turn the Rewind Crank

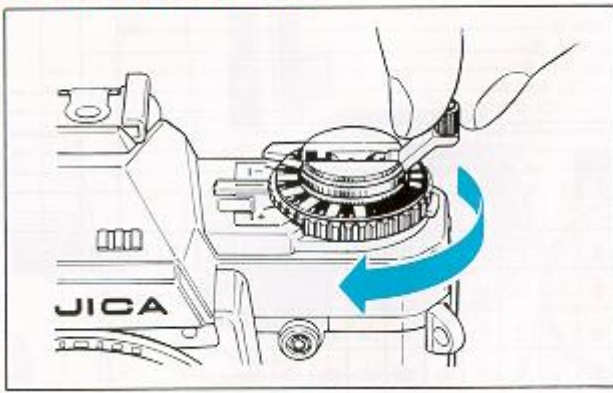

Erect the Rewind Crank and turn it in the direction of the arrow. You will feel a sudden release of tension when the film has been rewound into its cartridge.

2) Open the Camera Back by pulling the Rewind Knob all the way out and unload the film. (The Camera Back will not open unless the Rewind Knob is fully pulled out.)

### Open the Camera Back

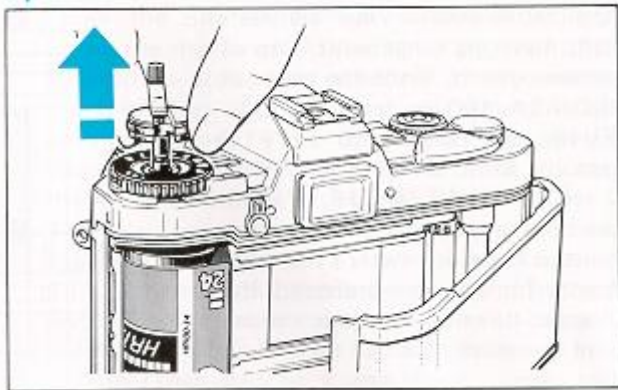

\* Be sure to open the Camera Back only after you have rewound the film back into the cartridge.

## Camera functions

1. Light metering range .. ....
2. AE lock (exposure memory} .....
3. Stopped-down automatic exposure . .
4. Manual exposure .....
5. Exposure compensation .....
6. Multiple exposure .....
7. Self-timer .....
8. Controlling the depth of field .....

9. Infrared photography .....

10. Taking flash pictures .....

**X-Fujinon lens operation and mount adapters .**

1. Changing the lens ...
2. Types of X-Fujinon interchangeable lends ..
3. Using Praktica screw-mount Fujinon lenses ..


**System accessories ..**

**Camera care .....**

**Specifications .....**

**CAMERA FUNCTIONS**

**1. LIGHT METER RANGE**

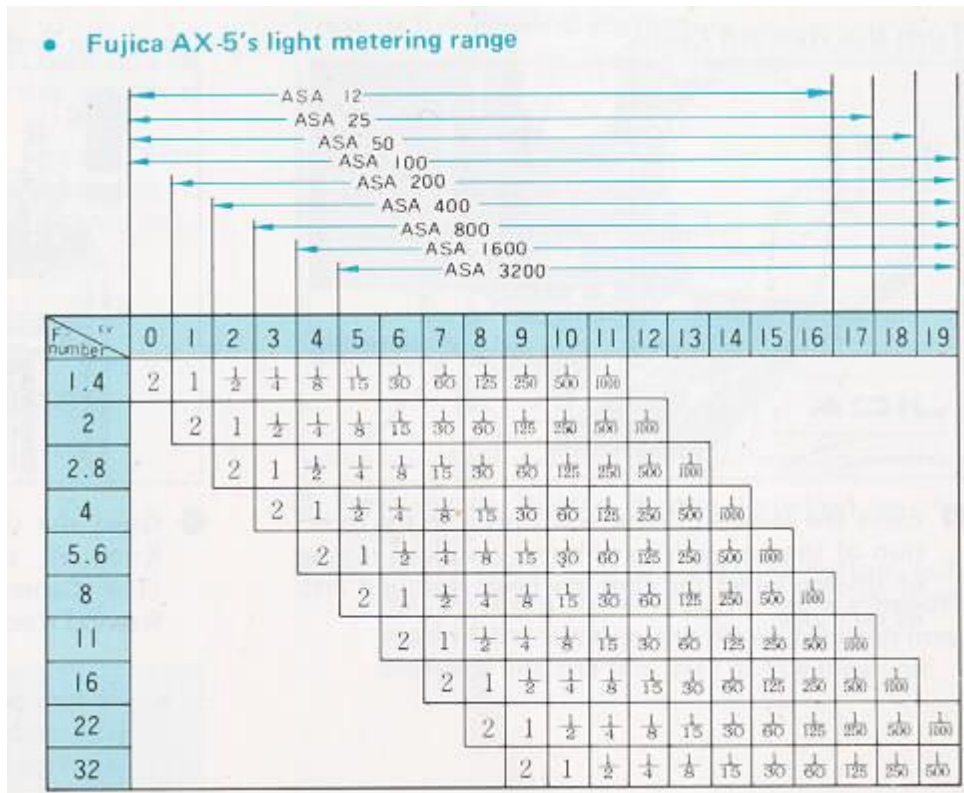


The table shows your camera's light metering range with films of various speeds. Since the range at ASA 100 is from EV 2 - EV 19, the range with an F1.6 lens is from EV3 1/3 (at F1.6, 2 sec.\ to EV 18 let F16, 1/1000-sec.) It applies to the camera's built-in exposure meter's measurements for programmed, aperture-preferred and stopped-down automatic exposure as well as manual.

## 2. AE LOCK (EXPOSURE MEMORY)

The exposure settings of your Fujica AX-1 can be locked with the AE lock.

(1) When the Shutter Release is pressed halfway down, the shutter speed (indicated by a red LED) coupled to the preset aperture to accommodate the brightness of the subject will remain locked until you take your finger off the Shutter Release. This is referred to as AE Lock (locking the AE or automatic exposure).

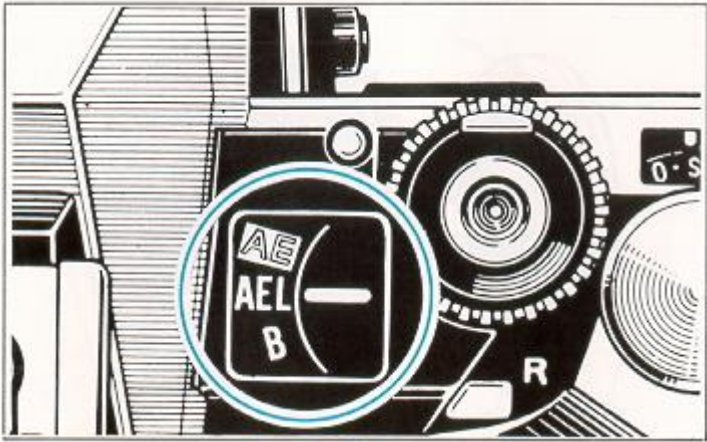


(2) The AE lock is useful for making automatic exposure compensation in backlighted situations. To compensate for backlighted portraits, you just bring the camera up close to your subject, press the Shutter Release halfway down and hold it there, then step back and shoot.

\* Don't take your finger off the Shutter Release until you trip the shutter.


### Notes:

1. As long as the Shutter Release is pressed halfway down, the position of the shutter speed indicating LED will not change even if the Aperture Ring is turned. If you want to use a different aperture, take your finger off the Shutter Release, reset the Aperture Ring, and check the shutter speed again through the Viewfinder.


2. Since the Aperture Ring (orange auto mark ) is not provided with an AE lock the only time you can lock the exposure setting is when the camera is operating in the aperture-preferred automatic exposure mode.

## 3. STOPPED DOWN AUTOMATIC EXPOSURE

You will have to use stopped-down automatic exposure when shooting with a Praktica screw-mount Fujinon lens (mounted with Mount Adapter X-S), an ultra-telephoto lens, through an automatic extension bellows, a microscope (with Microscope Adapter X) or a Macroincopy, or with the lens mounted in reverse (with Reverse Adapter X). And to prevent light from entering through the finder and fouling up your exposure setting, you will have to use the accessory eyecup or eyepiece cap.

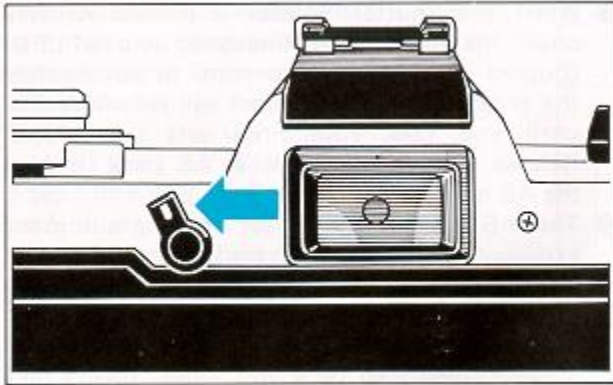


- 1) Set the Shutter Speed Selector to AE or AEL.
- 2) Set the Aperture Ring to the desired value.

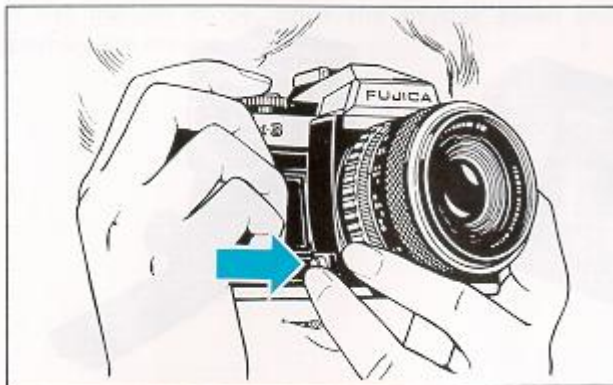

- 3) Press in the Preview Button and, while holding it there, look through the Viewfinder and press the Shutter Release halfway down to make sure that neither the overexposure nor the underexposure warning signal is blinking.

#### Lens (Mounted with the Mount Adapter X-S)

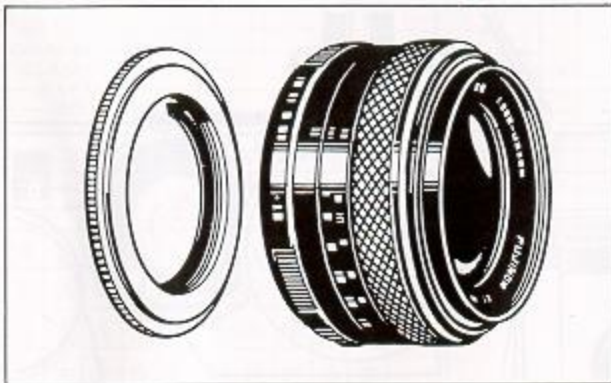

- 4) Take your picture by pressing the Shutter Release gently down,

Note: If you are shooting with the Shutter Speed Selector set to AEL, be sure to press in the Preview Button before you press the Shutter Release halfway down because your picture will not turn out properly exposed if you do it the other way around.

## Shooting through a microscope or macrocinecopy

### Shooting through a Microscope or Macrocinecopy



- 1) Set the Shutter Speed Selector to AE or AEL.
- 2) Look through the Viewfinder and press the Shutter Release halfway down to make sure that neither the overexposure nor the underexposure warning signal is blinking.
- 3) Take your picture by pressing the Shutter Release gently down.

### Stopped-down automatic exposure

Shooting with a **Unitar-telephoto lens, with a lens mounted in reverse, and through an auto Extension Bellows**




- 1) Set the Shutter Speed Selector to AE or AEL.
- 2) Set the Aperture Ring to the desired value.
- 3) Look through the Viewfinder and press the Shutter Release halfway down to make sure that neither the overexposure nor the underexposure warning signal is blinking.
- 4) Take your picture by pressing the Shutter Release gently down.




## 4. MANUAL EXPOSURE

In the manual mode, both the shutter speed and aperture are set manually.

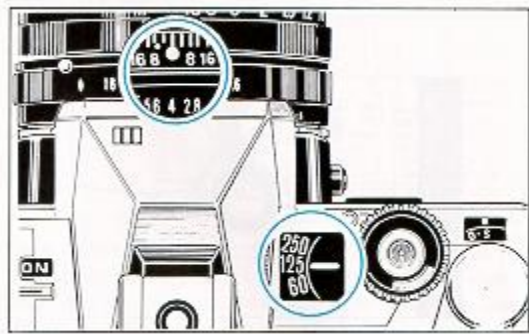

- (1) Set the Shutter Speed Selector to the desired speed .
- (2) Set the Aperture Ring to the desired value.
- (3) Look through the Viewfinder and press the Shutter Release halfway down for (depress the Meter Button).

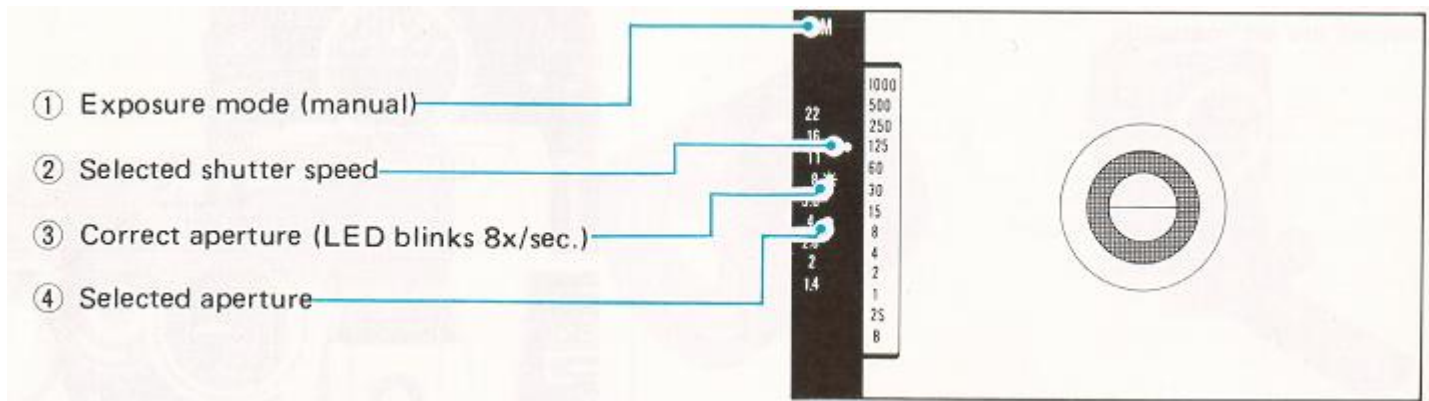

(4) If the shutter speed and aperture you selected are 1/125 sec. and F4 respectively and the yellow LED opposite F8 turns on and blinks, the correct aperture is F8.

(5) Move the Aperture Ring from F4 to F8 or, if you must use an aperture of F4, move the Shutter Speed Selector from 125 to 500 to turn off one of the yellow LEDs and stop the blinking.

(6) After making the correct setting, take your picture by pressing the Shutter Release gently down.

(7) You can easily make exposure compensation by taking advantage of the function just described. In the case shown in the above illustration, you can intentionally underexpose by 1 EV by setting the Aperture Ring to F11 or overexpose by 1 EV by setting it to F5.6:


(8) To take pictures requiring long exposures of 2 second or more, set the shutter speed selector to "B". The shutter will remain open for as long as the shutter release is held depressed so that you can trip the shutter when you want to.

## 5. Exposure compensation

Under normal conditions your pictures will be properly exposed without exposure compensation, but if you are shooting under special lighting conditions (against the light, etc.), or if you are taking intentional high key pictures (overexposed pictures) or intentional low key pictures (underexposed pictures), or if you are taking pictures under the conditions shown in the accompanying chart, exposure compensation is mandatory.

The procedures for making exposure compensation are as follows:

### Exposure Compensation with the Fractional Exposure Control

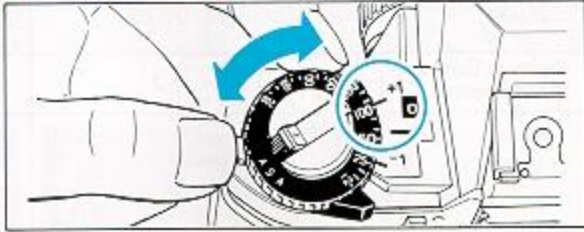

Just press in the Film Speed Selector Lock, move the film speed setting to the mark labeled +1 or -1 and take your picture. (Be sure to move it back to its original position after making your exposure.)

### Exposure Compensation with the Camera on Manual

(Refer to the Paragraph on Manual Exposure, Page 40.)

After checking the correct aperture indicated by the yellow LED in the Viewfinder, turn either the Aperture Ring or Shutter Speed Selector to increase or reduce exposure by the desired amount.

### Exposure Compensation with the AE Lock (Refer to the Paragraph on AE Lock, Page 35.)


Set the Shutter Speed Selector to AEL and use the AE lock to make exposure compensation.

## Exposure Compensation Chart

Subject	Backlighted portraits	light and reflections; scenes having a large sky area.	spotlighted subjects, especially against a dark background.
Exposure Compensation Required	+1 or +2	+1	-1 or -2
Sample Photo			
Subject	Black print on white paper	White print on black paper	Low reflectance subjects such as evergreen and other dark foliage.
Exposure Compensation Required	+2	-1 or -2	-1
Sample Photo			


## 5. MULTIPLE EXPOSURE

Multiple exposure is used to create special picture effects by superimposing the same scene or another scene several times on the same frame. It is easy to do with your Fujica AX-5.

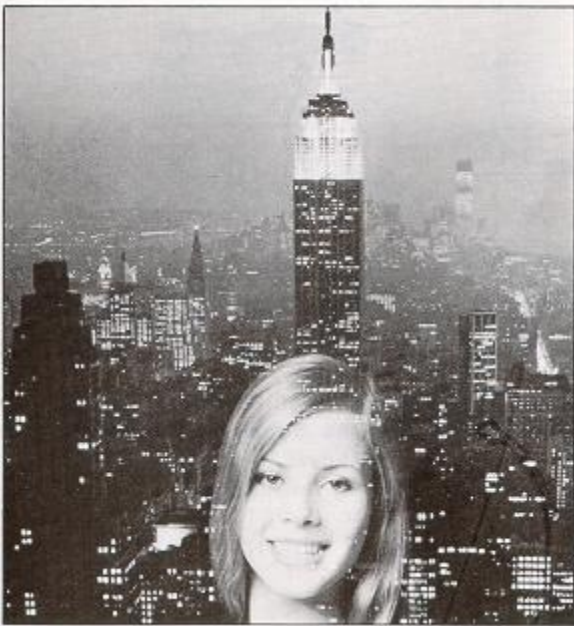

1) Take your first picture.

2) While pressing down the Rewind Button, wind the film with the Film Advance Lever. (The film will remain stationary, the shutter will wind, and the Exposure Counter will remain where it is.)

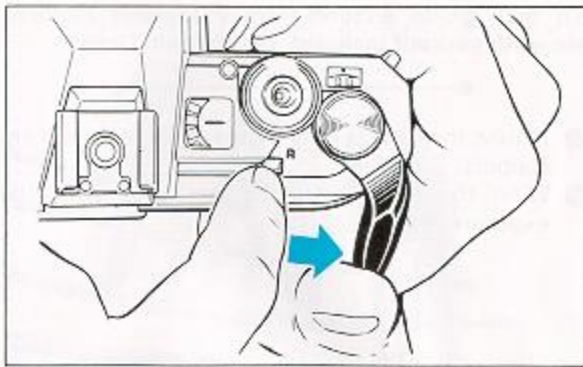

3) After winding the Film Advance Lever, take your second picture. You can repeat (2) and (3) as many times as you want.


**Notes:**

1. Multiple exposure is normally made by photographing the darker subjects first.
- 2 It cannot be made with an Auto Winder X coupled to the camera.
3. For best results, use a tripod.


## 7. SELF TIMER

To take group pictures, family souvenir pictures, etc. with yourself included, use the Self Timer.

1. Mount the camera on a tripod or some other firm support.
2. Wind the film, focus the lens, and make the exposure settings.

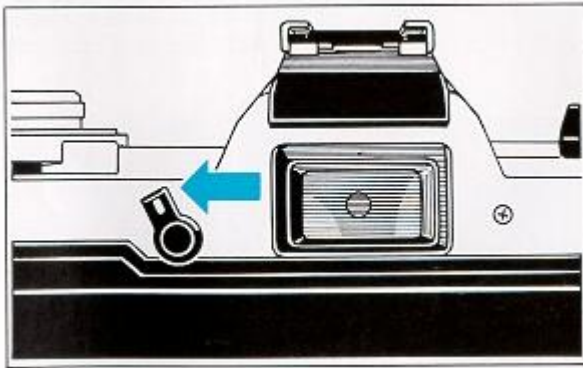

3. To prevent light from entering through the Eyepiece, mount the viewfinder Eyepiece to prevent extraneous light from entering it.

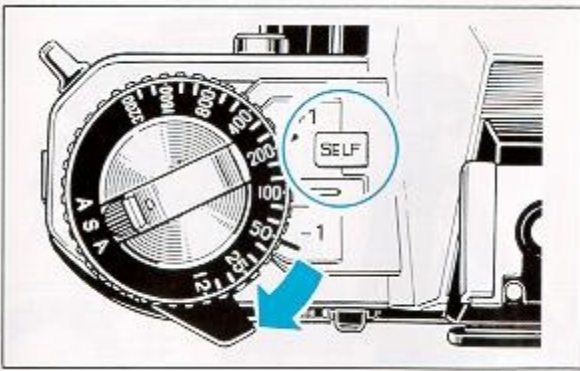

4. Push the Self-timer lever toward the camera back as far as it will go.
5. Press the Shutter Release gently down. (You will hear the sound of precision electronics beating time until the shutter trips 12 seconds later.)

**Note: 1. Be careful after you start the Self Timer because the shutter will trip the instant the Main Switch is pushed back to its original position.**

**2. You cannot turn off the Self-timer once it is activated.**

## 8. CONTROLLING THE DEPTH OF FIELD

Depth of Field




To check the effects of the aperture you selected -how well the background has been blurred out or how deep the zone of sharpness is- look through the Viewfinder and stop down the Lens to the taking aperture by pressing in the Preview Button. The reason you can exercise such control is that when the Lens is focused on a point, there will be a zone of sharpness extending to the front and back of that point of sharpest focus which is known as the depth of field of a lens and which works as follows:

1. The longer the lens focal length, the narrower the depth of field and vice versa.
2. The smaller the aperture, the wider the depth of field, and vice versa.
3. The farther the point on which the lens is focused, the wider the depth of field, and vice versa.
4. The zone of sharpness in front of the point of sharpest focus is narrower than the zone of sharpness behind it.

\* You can take advantage of this characteristic of photographic lenses to use "selective focusing," that is, to draw attention to your main subject by blurring out its surroundings or to make your pictures sharp all the way from foreground to background.

Using the Camera's Depth of Field Scale

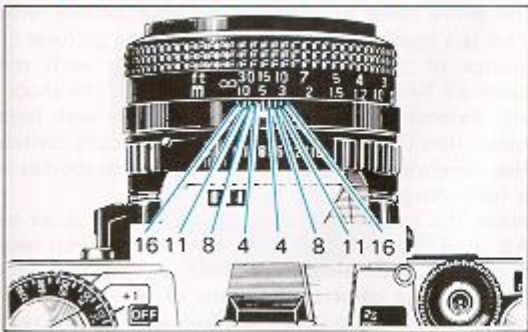

All the interchangeable lenses of your Fuji AX have a depth of field scale etched on the top of the lens barrel. If you are using an F1.6, 50 mm lens and have set the Aperture Ring to F8 and the Distance Ring to 5m, everything approximately between 3.5 and 8.7 meters from the camera will turn out sharp (the distance between the two 8s on the depth-of-field scale.)

Note: The X-Fujinon Z 1:3.5 - 4.2/29 - 47 mm DM and X-Fujinon Z 1:3.5 - 4.5/43 - 75 mm DM lenses have a depth of field scale with colored lines, which work together with the colored numbers on the aperture ring. Read the instructions packed with them lenses carefully.

## 9. INFRARED PHOTOGRAPHY

To take infrared pictures with infrared film in your camera, the Lens is focused on a point slightly short of your subject. The procedure is as follows:

1. Focus the lens on your subject.
2. Check the distance given on the Distance Ring and move that distance opposite the Infrared Setting Mark. Next, put a red filter on the Lens and shoot. (The Infrared Setting Mark is the small red dot located next to the Lens Setting Mark. )

\* Read the instruction sheet packed with your infrared film carefully because exposure is not determined by subject brightness.

## 10. TAKING FLASH PICTURES

Indoor, nighttime, and outdoor backlighted pictures are best taken with a flash.


To take automatic flash pictures with your Fuji AX-5, use either the Fuji Auto Strobe 300X or the Fuji Auto Strobe AZ. (Both are exclusive "system accessories" of your Fuji AX).

The Fuji Auto Strobe 300X is a large capacity flash having a guide number of 30 and it has a sub light to assist you to take bounce light pictures. By using this flash you can take perfect bounce light pictures every time, although this type of pictures are generally considered difficult to take with flash. In addition, it will automatically switch the camera's shutter speed to 1/60-sec. as soon as it is fully charged.


The Fujica Auto Strobe AZ has a guide number of 17 and it lets you take automatic flash pictures with the entire range of apertures on your camera lens. This is a highly effective flash for taking pictures of groups of people because it interlocks with the camera's film speed selector and extends the shooting distance when the camera is loaded with high speed film. This flash will also automatically switch the camera's shutter speed to 1/60 -sec. as soon as it is fully charged.

When the camera's Shutter Speed Selector is set to AE OR AEL, both auto flash units will let you take automatic flash pictures as soon as they are fully charged. The camera is capable of non-flash automatic exposure until they are fully charged, so even if the shutter is released by mistake, you will get a correctly exposed picture. You can also take continuous flash pictures in combination with the Auto Winder X.

## 1. Taking Automatic Flash Pictures with the Fujica Auto Strobe 300X

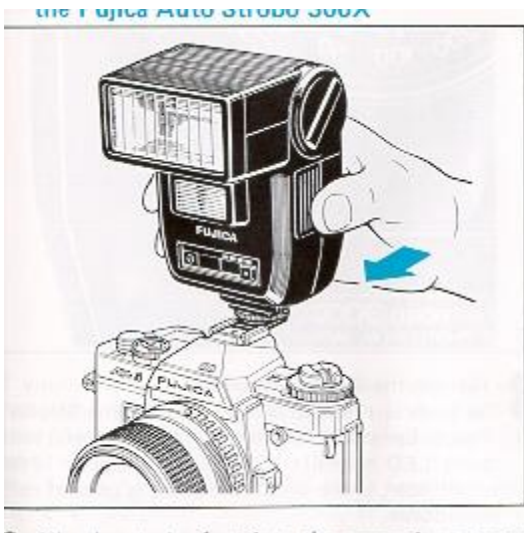

1. Clip the strobe foot into the camera's accessory shoe.
2. Set the camera's shutter speed selector to AE.

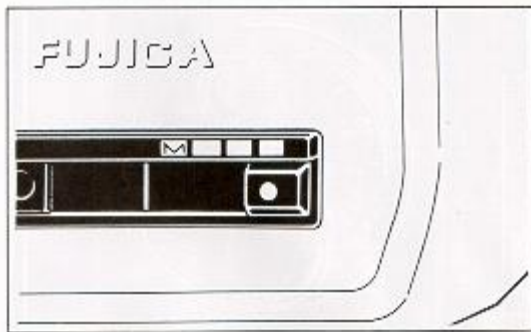


3. Set the Strobe's Distance Selector to either the yellow, green, or red mark. These marks represent the following shooting distances:

Yellow .....1 - 2.7 m {3.3 - 8.9 ft.)

Green .....1 - 5.3 m (3.3 - 17.5 ft.)


Red ..... 1.5 - 10.7 m (5 - 35.3 ft.)

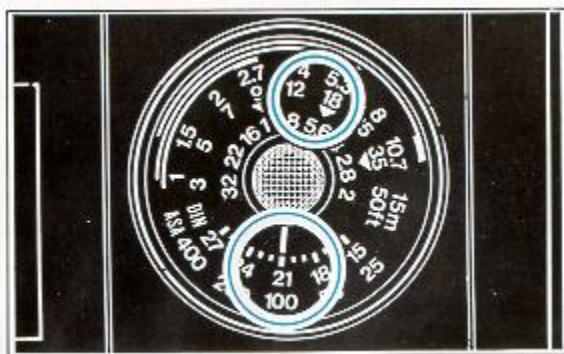

4. Set the ISO/ASA speed selector on the strobe back to the number corresponding to the speed of the film you are using.


5. Read off the aperture you need for the color of the mark you selected and set the camera's aperture ring accordingly.

Example: If you are using an ISO/ASA 100 film (Fuji color HR100) and have set the Strobe's Distance Selector to the green mark, the aperture is F5.6 so you'll have to set the camera's aperture to F5.6.

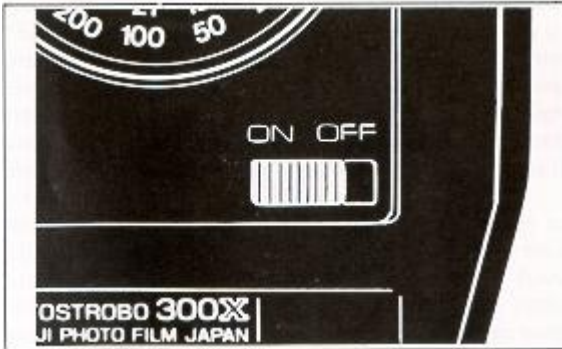

6. Turn on the Strobe Switch. You can go ahead and shoot as soon as the ready lamp turns on.


7. To take your picture, focus the lens, compose your subject, and press down the shutter release.

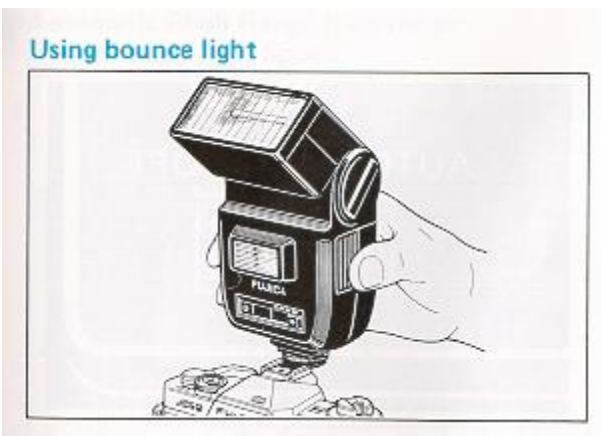

1. If your subject is standing near a wall, you will get distracting shadows in your picture if you flash it from the front. The situation calls for using bounce light. The Fujica Auto Strobe 300X has a head that will tilt 0 - 90°, and when tilted, it automatically converts into a twin flash having a main (G. No. 25) and a sub (G. No. 6) face to prevent your subject from becoming underexposed.




## 2. Taking Automatic Flash Pictures with the Fujica Auto Strobe AZ

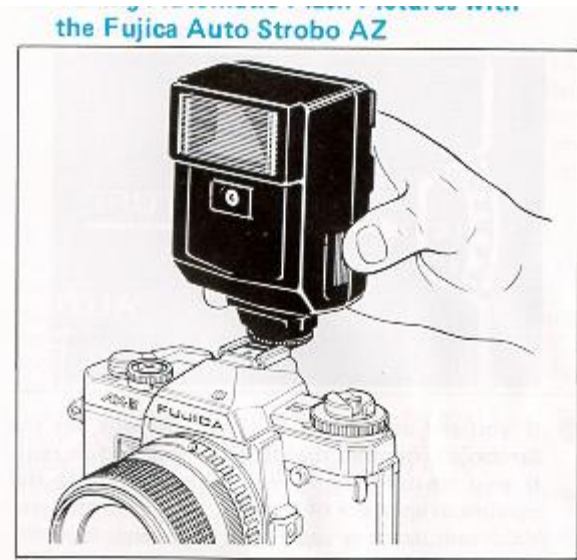

1. Clip the strobe foot into the camera's accessory shoe.
2. Set the shutter speed to AE or 60X.




3. If you are using an X-Fujinon DM lens, set the Strobe's F-number dial to F1.4 (marked in red). If you are using an X-Fujinon lens, set it to the maximum aperture of the lens.
4. You can use any aperture you wish but the shooting distance will differ depending on the aperture and the speed of the film you are using. (Use the accompanying chart as your guide for selecting the aperture).

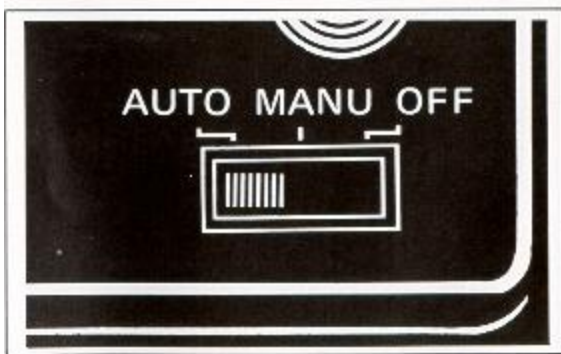

5. Switch the strobe switch to "AUTO" and shoot as soon as the Ready Lamp turns on.
6. To take your picture, focus the lens, compose your subject, and press down the Shutter Release.

## 10. TAKING FLASH PICTURES

### Automatic Flash Range Relative to Aperture and Film Speed

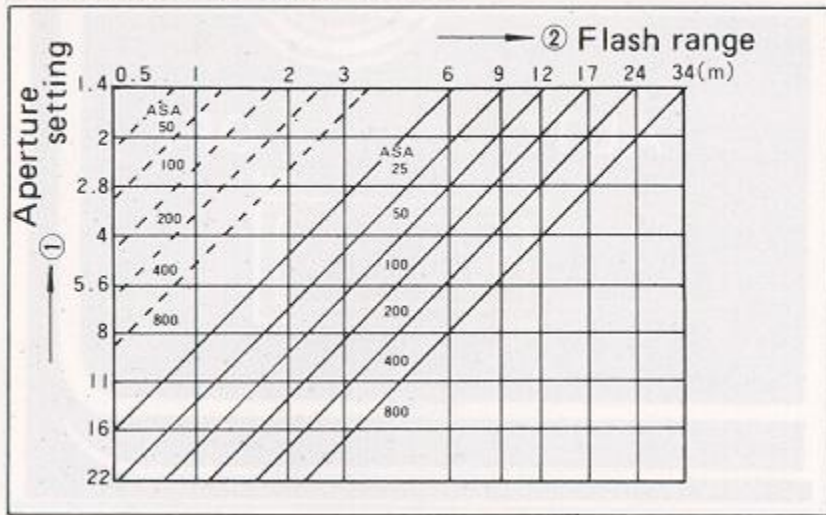

Note: The continuous diagonal lines on the right show the farthest shooting distances and the hyphenated lines on the left show the nearest shooting distances.

Example: ISO/ASA 100 film, F4 .... 0.5 - 4m (1.7 - 13.2 ft.) The nearest shooting distance for ISO/ASA 25 and 50 films is 0.5 meter at all apertures.

### 3. Taking Automatic Flash Pictures with Other Auto-flash Units

Set the Shutter Speed Selector to 1/60 sec. (X sync) and set the Aperture Ring to the specified value. The flash will do the rest to give you correctly exposed pictures. (For details, read the instructions packed with the flash you are using).

### 4. Other Flash Units


You'll have to find the correct aperture to use by dividing the flash guide number by the distance from flash to subject and set the Aperture Ring accordingly.

Example using an ISO/ASA 100 film (Fujicolor HR100)  
Flash guide number (ISO/ASA 100, meters) .....20  
Flash to subject distance .....5m  
Since 20 divided by 5 = 4, the correct aperture is F4.

Example using an ISO/ASA 400 film (Fujicolor H R400) The guide number is double that of the ISO/ASA 100 film so 40 divided by 5 = 8 and the correct aperture is F8.

If your computation yields a number which falls between two f-numbers given on the Aperture Ring, set the Ring to the smaller of the two numbers (larger aperture).

**CAUTION:**

Your Fujica AX-5 does not allow you to take auto flash pictures if the Aperture Ring is set to the Auto (Orange ) mark, that is, if the camera is operating in the shutter-preferred or programmed mode.

**X-Fujinon lens operation and mount adapters****1. CHANGING THE LENS**

① Classification	⑧ Designation			⑨ Composition		⑫ Angle of view	⑬ Diaphragm		⑭ Minimum focusing distance		⑳ Weight (gr.)	㉑ Dimensions (mm)		㉓ Hood	㉔ Filter (mm)	
				⑩ Components	⑪ Elements		⑮ Aperture control	⑯ Minimum aperture	⑰ Meter	⑲ Feet		㉒ Maximum diameter	㉕ Overall length			
② Fish-eye	F	1:2.8	16mm	DM	8	12	180°	⑰ Fully automatic	22	0.25	0.8	420	74.0 ϕ	56.0	㉓ Built-in	㉔ 4 built-in filters
③ Wide-angle	W	1:2.8	24mm	DM	8	9	84°	Fully automatic	16	0.25	0.85	195	61.5 ϕ	45.5	㉓ Rectangular hood, fit-on	㉔ 49 ϕ
	W	1:3.5	28mm	DM	7	7	74°	Fully automatic	16	0.3	1.0	195	61.5 ϕ	41.0	㉓ Rectangular hood, fit-on	㉔ 49 ϕ
	W	1:2.8	35mm	DM	6	7	62°36'	Fully automatic	16	0.35	1.2	190	61.5 ϕ	46.0	㉓ Screw-in	㉔ 49 ϕ
④ Normal		1:1.6	55mm	DM	4	5	42°10'	Fully automatic	16	0.45	1.5	275	61.5 ϕ	51.0	㉓ Screw-in	㉔ 49 ϕ
		1:2.2	55mm		4	4	42°10'	Fully automatic	16	0.6	2	130	61.5 ϕ	37.0	㉓ Screw-in	㉔ 49 ϕ
⑤ Macro	M	1:3.5	55mm	DM	4	5	42°45'	Fully automatic	22	0.241	0.8					㉔ 49 ϕ
⑥ Telephoto	T	1:2.8	100mm	DM	4	5	24°24'	Fully automatic	22	(1.2)	(4)		61.5 ϕ	61.5	㉓ Screw-in	㉔ 49 ϕ
	T	1:3.5	135mm	DM	4	4	18°13'	Fully automatic	22	1.5	5	290	61.5 ϕ	79.0	㉓ Screw-in	㉔ 49 ϕ
	T	1:4.5	200mm	DM	5	5	12°20'	Fully automatic	22	2.5	8.2	490	64.5 ϕ	134.0	㉓ Built-in	㉔ 49 ϕ
	T	1:4.5	400mm		4	5	6°11'	㉖ Manual	45	8	26		101.0 ϕ	291.5	㉓ Built-in	㉔ 49 ϕ
⑦ Zoom	Z	1:3.5-1:4.2	29-47mm	DM	8	8	73°30'-49°30'	Fully automatic	22	0.6	2	285	64.5 ϕ	52.0	㉓ Fit-on	㉔ 55 ϕ
	Z	1:3.5-1:4.5	43-75mm	DM	7	7	53°30'-32°6'	Fully automatic	22	1.2	4	310	64.0 ϕ	62.5		㉔ 49 ϕ
	Z	1:4.5	75-150mm	DM	10	12	32°16'-16°23'	Fully automatic	22	1.8	6	715	69.5 ϕ	144.5	㉓ Built-in	㉔ 62 ϕ

An advantage of the SLR camera is that it permits you to use many different kinds of lenses, and there are a wide variety of high performance X-fujinon interchangeable lenses of outstanding color compatibility available to you for taking scenic, portraits, snapshots, etc.






## 2. TYPES OF X-FUJINON INTERCHANGEABLE LENSES

There are two types:

X-Fujinon DM Lenses {Lenses with an Orange  Mark on the Aperture Scale)

These are capable of full aperture metering and programmed, shutter-preferred, and aperture-preferred automatic exposure.

However, your Fujica AX-5 is provided for full aperture metering and aperture-preferred automatic exposure only. Do not set the Aperture Ring to the orange (diamond) mark.

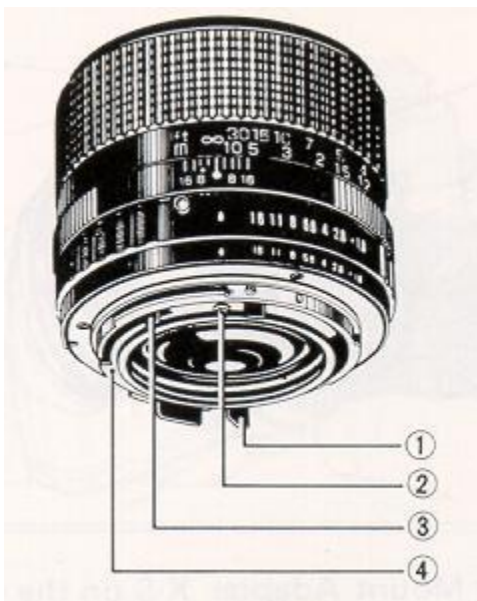

### 1. Auto-diaphragm lug

(Stops down the aperture to the preset value just before exposure by the operation of the Aperture Control Lever in the camera body.)

## 2. Full aperture signal pin


(Having a special built-in resistor for full aperture, it signals the viewfinder indicator and auto strobe circuits in the camera body on contact with a pin in the body.)

## 3. Aperture keying lug

(It signals the f-number to the camera body, works at 6 degrees intervals per step, and stops the aperture down to minimum when the Aperture Ring is set for the orange  mark.)

## 4. Lens auto/manual groove

(When a DM lens is mounted, it presses in the auto/manual pin in the camera body to activate the automatic aperture setting circuit, and when the lens is on manual, it activates the circuit for stopping the aperture down to the preset value.)


X-Fujinon Lenses (Lenses without the  Mark on the Aperture Ring)

These can be used for full aperture metering and aperture-preferred automatic exposure but not for programmed and shutter-preferred automatic exposure. They are not provided with functions (2) and (4) of the DM lenses.

## 3. USING PRAKTICA SCREW-MOUNT FUJINON LENSES

These lenses are mounted on your Fujica AX-5 with the Mount Adapter X-S (optional). The procedure for taking pictures is explained below. For details read the instructions packed with the adapter.

Mount Adapter X-S


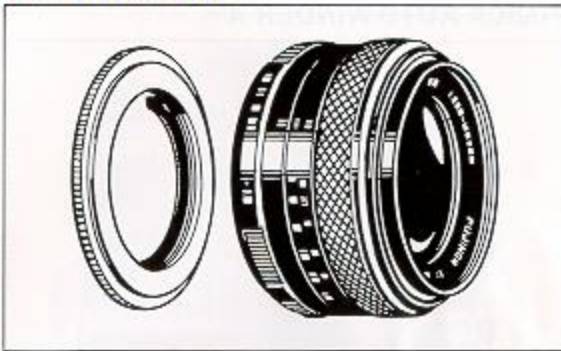


1. Screw the Mount Adapter X-S on the rear end of your lens.
2. Place the red dot on the adapter's rear end against the red dot on the camera's Lens Mount and turn the lens 65° to the right (clockwise). It will lock into position with a click.

Set the adapter's aperture scale for the maximum aperture of the lens you are using. If the adapter does not have that f-number, set it to the one nearest to that number.

Example: F 1.6/55mm lens set adapter to F 1.4

F1.8/55mm lens set adapter to F2

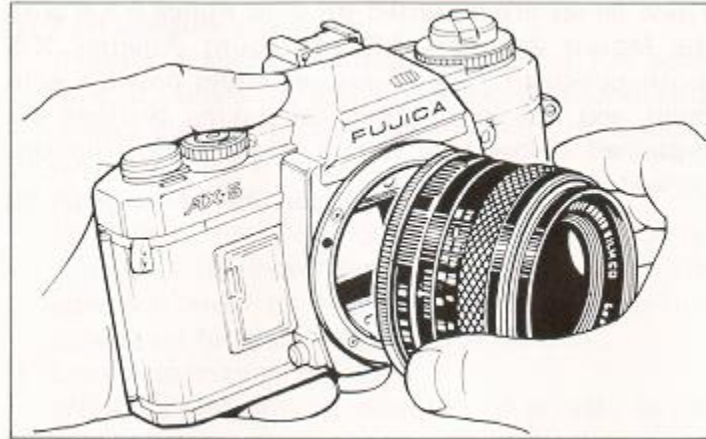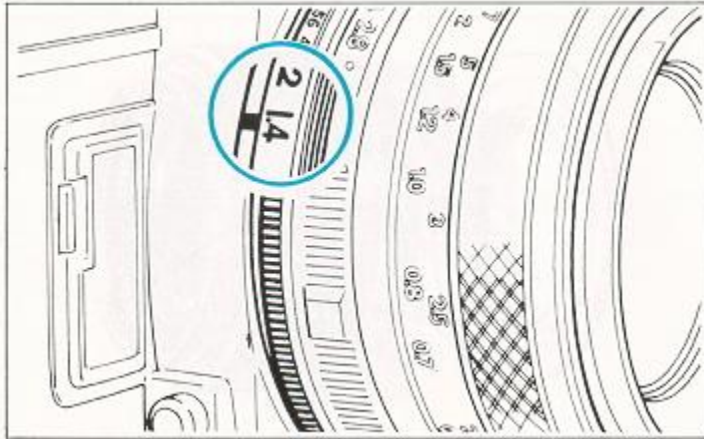

Note: If the adapter's aperture scale is set to M, it will work in practically the same way as the Mount Adapter X-S. Follow the procedure shown below for the Mount Adapter X-S.

### **Praktica Screw-mount Fujinon Lens with Mount Adapter X-S**

The exposure mode possible in this case is stopped down automatic exposure.

(1) Screw the Mount Adapter X-S on the rear end of your lens.

(2) Place the red dot on the adapter's rear end against the red dot on the camera's Lens Mount and turn the lens 65° to the right (clockwise). It will lock into position with a click.

Note: If you are shooting with an adapter, the LED aperture indicator in the viewfinder will always turn on in the lowest position regardless of the aperture which is set. Caution is required, therefore, because it is impossible to check the aperture while looking through the viewfinder.

### **CAMERA CARE**

\* After you are through shooting, be sure to trip the shutter by pressing down the shutter release button.

\* Normally, your camera does not need lubricating. It should never be oiled or taken apart except by a qualified service technician.

\* Periodically, dust off your camera and wipe it with clean, lintless cloth. Use an air blower to remove dust and film debris from the interior.

\* If you are not using your camera for a long interval, take it out of its case, remove the battery, and store it away from moisture, heat, and dust. The best way to store it is to keep it in a lidded container together with some desiccant, such as silica gel.

\* Guard the lens and viewfinder against finger marks and dust. Use an air blower to remove dust. Finger marks are removed with Fuji Lens cleaning Fluid or Lens Cleaning Paper. Do not touch the mirror because it will damage easily.

- \* Keep a note of your camera and lens numbers so that you can trace them in case they go astray.
- \* If you are shooting sea-side scenes, carry the camera in a vinyl bag and take it out only when you need it. After you return home, wipe off salt and sand with a piece of clean, lintless cloth.
- \* Take your camera to your service technician for its checking about once every two years. It will give you better and longer service.
- \* On hot days, do not leave your camera in your car or in moist places except temporarily for a very short time.
- \* In freezing weather, keep it warm by putting it in the case and carrying it inside your wind breaker and take it out only when it is needed.
- \* Guard against dropping your camera on the floor and do not leave it in direct sunlight.

## **SPECIFICATIONS:**

**Description:** Automatic exposure 35 mm SLR with focal plane shutter.

**Exposure Modes:** Shutter preferred, aperture-preferred, programmed automatic exposure; manual exposure.

**Picture Size:** 24 x 36 mm

**Interchangeable Lenses:** X-Fujinon DM lenses; X Fujinon lenses; Fujinon lenses (capable of automatic exposure when mounted with the Fujica Mount Adapter X-S).

**Standard Lens:** EBC X-Fujinon 1:1.6 f=50 mm DM, 6-component, 6-element X-Fujinon Z 1:3.5 - 4.5 f=43 - 75 mm DM. 7-component, 7 element.

**Lens Mount:** Fujica X Mount (bayonet mount) :65' turn: 43.5 mm flange back

**Viewfinder:** Silvered pentaprism eye level type.

**Finder Field of View:** 92% vertically and horizontally.

**Finder Magnification:** .86X (with 50 mm lens set to infinity)

**Finder Dioptry:** -1.0 diopters, Focusing Three-way (split-image, microprism, ground glass screen)

**Viewfinder Information:** LED exposure mode indicator, shutter speed scale, aperture scale, over and underexposure warning, battery check signal.

**Finder Information Reading:** By turning on the main switch and pressing the shutter release halfway down or the meter button all the way down.

**Finder Eyepiece Construction:** Built for attaching right angle finder. eyesight correction lenses and eyecup

**Eyepiece shutter:** Built-in for preventing entrance of unwanted light.

**Finder Eyepiece:** Construction Built for attaching right angle finder, eyesight correction lenses and eyecup

**Mirror:** Coated, quick return type.

**Automatic Exposure Control:** Three-magnet, electronic control interlocking with shutter speed and aperture selectors.

**Light Metering:** Silicon photocells. center-weighted averaging system.

**Light Metering Range:** ISO/ASA 100: EV 0 - 19 (F1.4 2 sec -F22 1/1000 sec)

**Film Speed Setting:** ISO/ASA 12 - 3200, 1/3 step, provision for locking.

**Exposure Compensation:** 1 stop by means of the camera's fractional exposure control

**Exposure Memory (AE Lock):** Locking the exposure setting by pressing the shutter release halfway down and holding it there.

**Depth of Field Preview:** Pushbutton

**Manual Exposure:** By setting both the shutter speed and aperture manually and making adjustments by checking the settings against the LED aperture indicator in the viewfinder.

**Shutter:** Cloth focal plane, electronically controlled from 1/2 second to 1/1000 second in 1/4 steps (digital control; oil less metal.)

**Shutter Speed Scale:** B, AEL, AE, 2S, 1, 1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/125, 1/500, 1/1000.

**Power Source:** 6V silver-oxide battery (4SR44), alkaline-manganese battery (4LR44) or lithium battery.

**Battery Condition Signal:** **Blinking** of a red LED in the viewfinder opposite the letter B on the shutter speed scale.

**Main Switch:** On/off switch located on the camera top; also serves as the self-timer switch.

**Shutter Release:** Two-step electromagnetic release; first step activates light meter and viewfinder information circuit, second step completes exposure; provided with meter button.

**Multiple Exposure:** By winding the film while pressing in the film rewind button.

**Self-timer:** Electronically controlled; trips shutter in 12 seconds; audible signal (beep-beep) keeps you alert until  
shutter trips.

**Sync Contact:** X contact. 1/60-sec. hot shoe; special contacts for exclusive flashes.

**Auto-flash System:** Automatic shutter speed setting with exclusive flash; automatic flash exposure.

**Camera Back:** Snaps open when the film rewind crank is pulled out:  
can be removed and replaced with a data back (Fujica Photo Recorder, optional! for printing data on the film.

**Film Loading:** Multiple-slit take-up spool for easy loading.



**Film Advance:** Single-stroke lever on camera top: provision for advancing film in small increments 144 degree winding angle, 25 degree stand off.

**Exposure Counter:** Automatic reset, additive; counts backward during film rewind, remains still during multiple exposure.

**Film Rewind:** Rewind button and crank button automatically returns to normal position when crank is wound.

**Dimensions:** Body: 135x86x54 mm (5.4 x 3.39 x 2.1 in.)  
With 1.6/50 mm lens: 135x86x87 mm (5.4x3.39x3.43in.)

**Weight Body:** 500g (17.5 oz)  
With F1.6/50 mm lens: 695g (24.5 oz.)

**Included Accessories:** Hard case, carrying strap, lens front cap, viewfinder eyepiece cap, rubber lens hood.

**Interchangeable Lenses:** See list on page 54.

**Optional Accessories:** Fujica Auto Winder X, Fujica Auto Strobe AZ, Fujica Auto Strobe 300X, Fujica Photo Recorder, Fujica Mount Adapter X S, Fujica Auto Extension Tube X25, Fujica Auto Extension Tube X50, Fujica Auto Bellows X, Fujica Slide Copier X, Fujica Microscope Adapter X, Fujica Macro Cine Copy X, Fujica Reverse Adapter X, Fujica Focusing Rail X, Fujica Right angle Finder, Fujica Eyesight Correction Lenses, Fujica Eyecup, Fujica Teleconverter 2X.

**Fujica Filters:** (12 types), Gadget Bags L&S.

**Notice:** Specifications are subject to change without notice.

## SYSTEM ACCESSORIES

Your Fujica AX-1/AX-3/AX-5 has a complete assortment of "system accessories" designed to expand the camera's scope and increase the fun of picture taking.


### FUJICA AUTO WINDER X



This compact, lightweight unit is attached to the bottom of your camera to

wind the film automatically at a rate of two frames per second so that you can concentrate on your subject and won't miss those decisive moments that can easily be lost forever. It will advance the film continuously while the shutter release is depressed or one frame at a time each time the shutter is tripped. It operates on four penlight batteries and a red LED will turn on while the film is advancing.

#### FUJICA PHOTO RECORDER

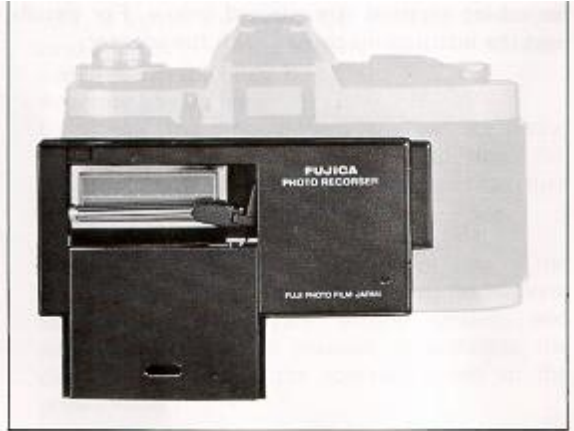


This data back is interchangeable with the Camera Back and is equipped with a hand-writing pen that is inter linked with a "light pen" for printing in data (up to about 30 letters) in the bottom left corner of the picture. The Camera Back can be easily detached by pushing down the hinge pin.

#### FUJICA RIGHT ANGLE FINDER



An accessory for simplifying viewing when the camera must be held low to the floor or when it is attached to a copying board. It is provided with an eyesight adjustment lens.

## FUJICA AUTO EXTENSION TUBE

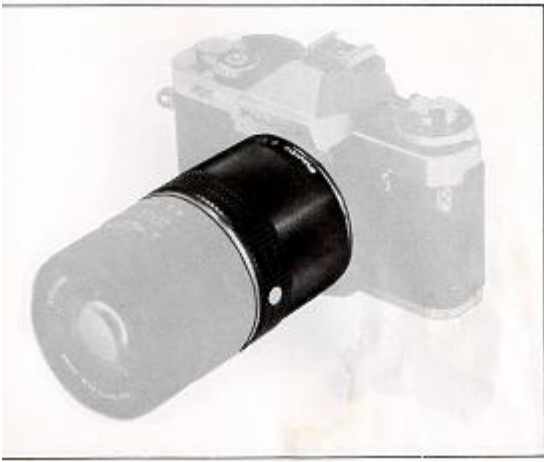


They are used for taking ultra close-ups and have a tube length of 25mm and 50mm. Combined with a normal lens, the X25 unit provides 1/2-actual-size, and the X50 unit life size, pictures. Exposure setting is easy because it offers full aperture metering and automatic stop down.

## FUJICA AUTO BELLOWS X




Designed for taking ultra-close-ups, it provides 1 - 3X magnification in combination with a 50mm normal lens. It is equipped with an automatic diaphragm to allow you to focus with the aperture wide open. Convenience accessories include a focusing rail and a slide copier.

### FUJICA FOCUSING RAIL X

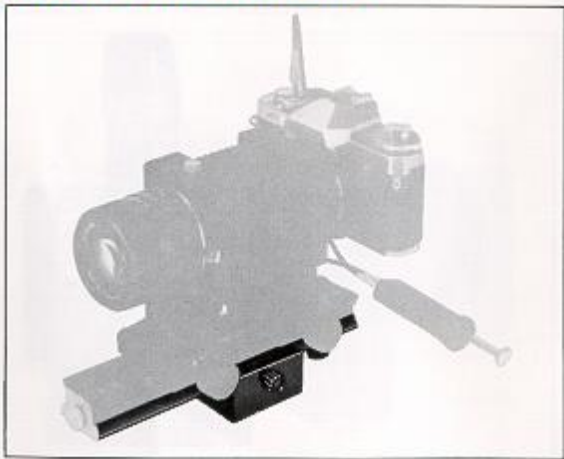

This is used in combination with the Fujica Auto Bellows X to permit simple, accurate focusing.

### FUJICA SLIDE COPIER X

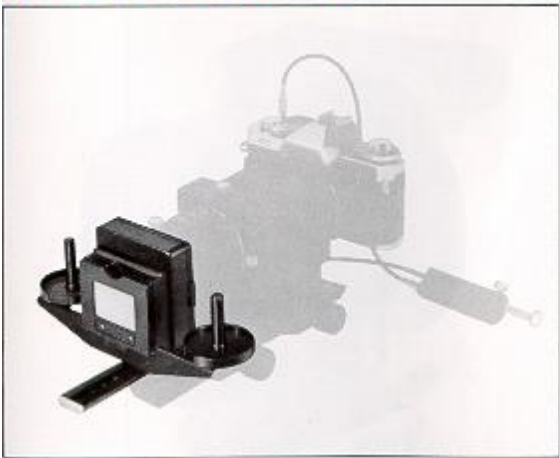

Attached to the front end of the Fujica Focusing Rail X, this copier simplifies copying of color and black and white slides as well as roll-film pictures.

### FUJICA CLOSE-UP LENS



Attached to a F 1.6 50mm normal lens, it lets you take close-ups of subjects about 32 to 48cm away from the camera lens.

### FUJICA MACRO CINE COPY X




This accessory is used for copying pictures taken on 8 and 16mm films.

### FUJICA MICROSCOPE ADAPTER X



This is used to couple the camera to a microscope to take photomicrographs.

### FUJICA REVERSE ADAPTER X

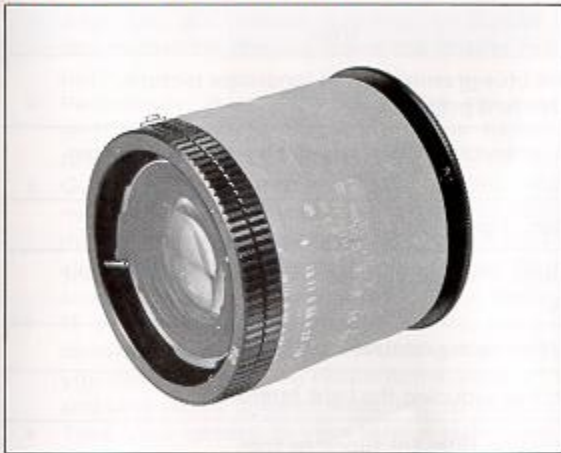

It lets you mount the lens in reverse to take close-ups. Larger-than-life close-ups will turn out sharper when the lens is mounted in reverse on an extension bellows with this adapter.

## FUJICA TELECONVERTER 2X



Mounted between the lens and camera body, it will double the focal length of your lens to take telephoto pictures.

## SYSTEM ACCESSORIES

## FUJICA FILTERS (12 types)

Filter	Film type	Uses
SKYLIGHT (1B)	Black and White, color	Reduces the blue-greenishness in landscape picture. Used also for lens protection.
UV	Black and white, color	Ultraviolet absorbing filter. Used also for lens protection.
SY48	Black and white	Yellow filter. For landscapes.
S056	Black and white	Orange filter. For pictures of mountains and distant landscapes.
SR60	Black and white Red filter.	For strong contrast and infrared pictures.
ND4X	Black and white color	Gray filter. For reducing the light intensity.
LBA-12	Color	Color conversion filter for tungsten film.
LBB-12	Color	conversion filter for daylight film.
FL-W	Color	Light balancing filter for shooting in fluorescent light.
PL	Black and white, color	Removal of reflections.
CROSS4	Black and white, color	For special effects. Contains a cross screen.
MULTI-5	Black and white, color	For special effects. Yields multiple images (5) on the same frame.